


SPECIFICATION TOP BEND NEON

NA-T1607 AC230V/AC120V IP65




Features

- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength.
- Environmental protection grade silicone material, integrated extrusion molding process.
- Unique optical light distribution structure design, uniform lighting surface and no shadow.
- IP65 protection level, salt solution resistance, acids & alkalis, corrosive gases, fire and UV
- Excellent toughness, simple and stylish appearance, delicate and unique.
- 3-5 years warranty, working life ≥50000 hours.

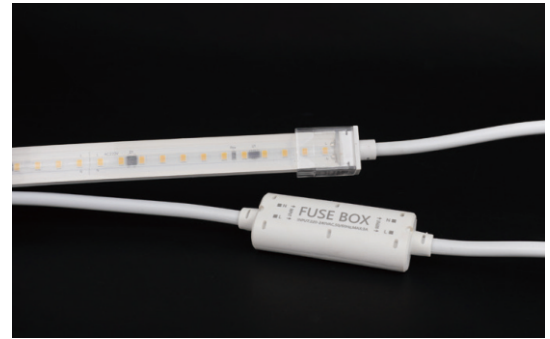

Dimensions(Unit:mm)

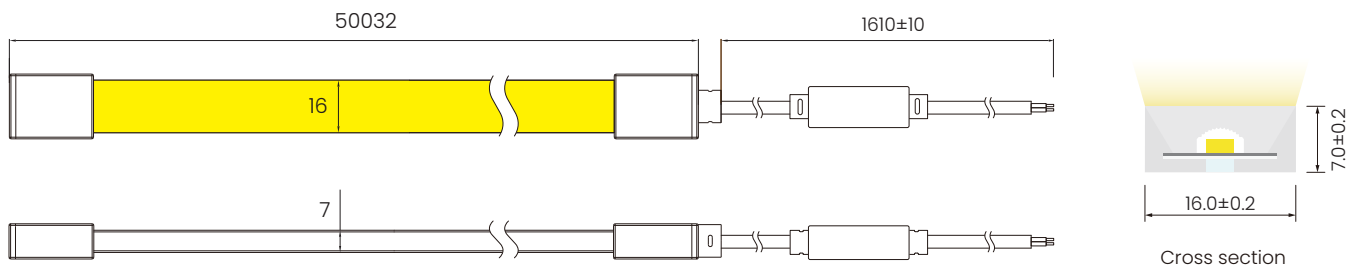

General Parameters

Voltage	AC230V/AC120V
LED Solder-Point Temperature	Max. 65°C
Storage Temperature	-25°C~ 60°C
Ambient Temperature	Min.-25°C, Max (Table below)
CRI	see parameter tables





Power Ratings

Power(w/m)	12
Efficacy(lm/w)@4000K	AC230V:76 AC120V:79.5
Max Ambient Temperature	45°C

Due to the tolerance of the production and electrical components, output value and electrical power can vary up to 10%

Length Standard

Length Range (M)	Final Length(mm)		Tolerance (mm)
	Solder free end cap	Silicone end cap	
0M<Neon Strip(L)≤5M	L+32	L+4	±7
5M<Neon Strip(L)≤10M	L+32	L+4	±10
10M<Neon Strip(L)≤15M	L+32	L+4	±13
15M<Neon Strip(L)≤20M	L+32	L+4	±16
20M<Neon Strip(L)≤25M	L+32	L+4	±19
25M<Neon Strip(L)≤30M	L+32	L+4	±22
30M<Neon Strip(L)≤35M	L+32	L+4	±25
35M<Neon Strip(L)≤40M	L+32	L+4	±28
40M<Neon Strip(L)≤45M	L+32	L+4	±31
45M<Neon Strip(L)≤50M	L+32	L+4	±34



Note: The above data is based on AC230V ,12W/M, single colour with 4000k colour temperature. If you need IES files for other types. Please contact our sales department.



Single color : Model NA-T1607AC230-Cx-A

CCT(K)	CRI	Voltage	Power(W/m)	Lumen (lm/m)	Efficiency (lm/w)	Unit Length (mm)	Max. Run Length (M)
1800K±100	≥90	AC230	12	575	47.9	100	50
2400K±150	≥90	AC230	12	726	60.5	100	50
2700K±150	≥90	AC230	12	810	67.5	100	50
3000K±150	≥90	AC230	12	791	65.9	100	50
3500K±200	≥90	AC230	12	840	70.0	100	50
4000K ⁺⁴⁰⁰ ₋₂₀₀	≥90	AC230	12	913	76.1	100	50
5000K ⁺⁵⁰⁰ ₋₃₀₀	≥90	AC230	12	863	71.9	100	50
6500K±500	≥90	AC230	12	869	72.4	100	50
1800K±100	≥90	AC120	12	600	50.0	100	30
2400K±150	≥90	AC120	12	756	63.0	100	30
2700K±150	≥90	AC120	12	846	70.5	100	30
3000K±150	≥90	AC120	12	828	69.0	100	30
3500K±200	≥90	AC120	12	882	73.5	100	30
4000K ⁺⁴⁰⁰ ₋₂₀₀	≥90	AC120	12	954	79.5	100	30
5000K ⁺⁵⁰⁰ ₋₃₀₀	≥90	AC120	12	906	75.5	100	30
6500K±500	≥90	AC120	12	912	76.0	100	30

- Maximum run length refers to the maximum length powered from one end using the standard 30 cm cable.
- For the load capacity of the solder free end cap, please refer to <The Maximum Load Capacity of Power Cables>
- The specified color temperature refers to the finished product.
- The values shown are typical. Due to production and component tolerances, light output and electrical power may vary by up to ±10%.
- All products can be dimmed; The dimmer voltage must match the rated voltage of the LED strip.

Cable Entry and End Cap Options (Unit: mm)



Solder Free End Cap Without Screws (IP65)



Front Cable Entry

Closed End Cap


Silicone End Cap (IP65)



Front Cable Entry

Closed End Cap

Cables and Connectors

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
Rubber cable		OD6.8mm:2x1.0mm ² white round wire		Brown V+/Blue V-


Cable Maximum Load Capacity

a. Assembled end cap with single-ended power supply, its maximum load power is as follows:

Color	Maximum load current(A)	AC230V Maximum load Power(W)	AC120V Maximum load Power(W)
Single color	3	690	360

b. When one end of the single color led neon goes out, the power exceeds the wattage listed in the table, it is recommended to use integrated or silicone end cap;



Accessories




Dimension: 14x18.6x10.3mm

Accessories: M3 × 16 mm (SUS304)


Installation Precautions

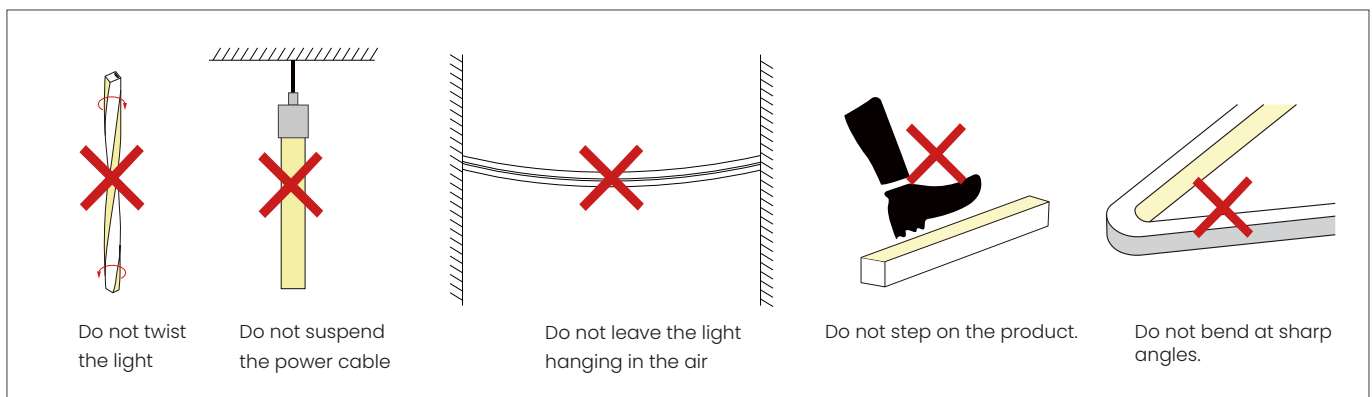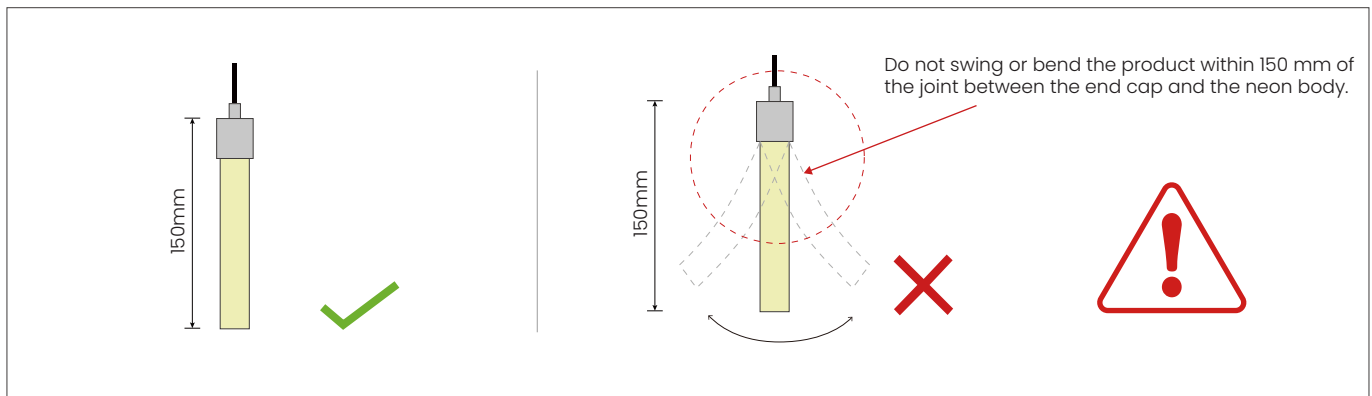


Insert into the Profile

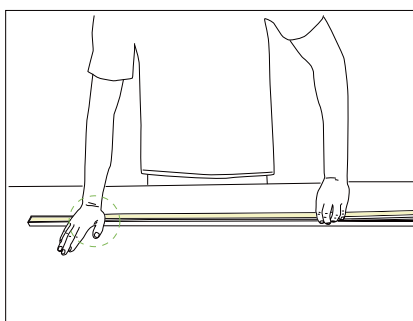

- Use your palm to slowly press the LED strip into the channel, then gently straighten it along the channel.
- Try to keep the led strip in a flat state during the installation process.

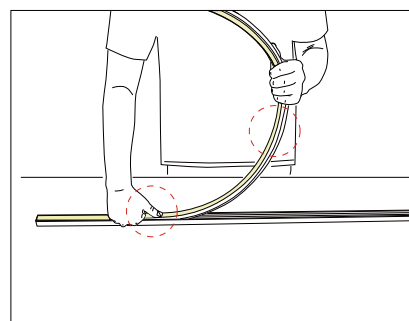

- Do not press the LED strip with one finger; this may damage internal components.
- The bent arc of the led strip should not be too large during installation.

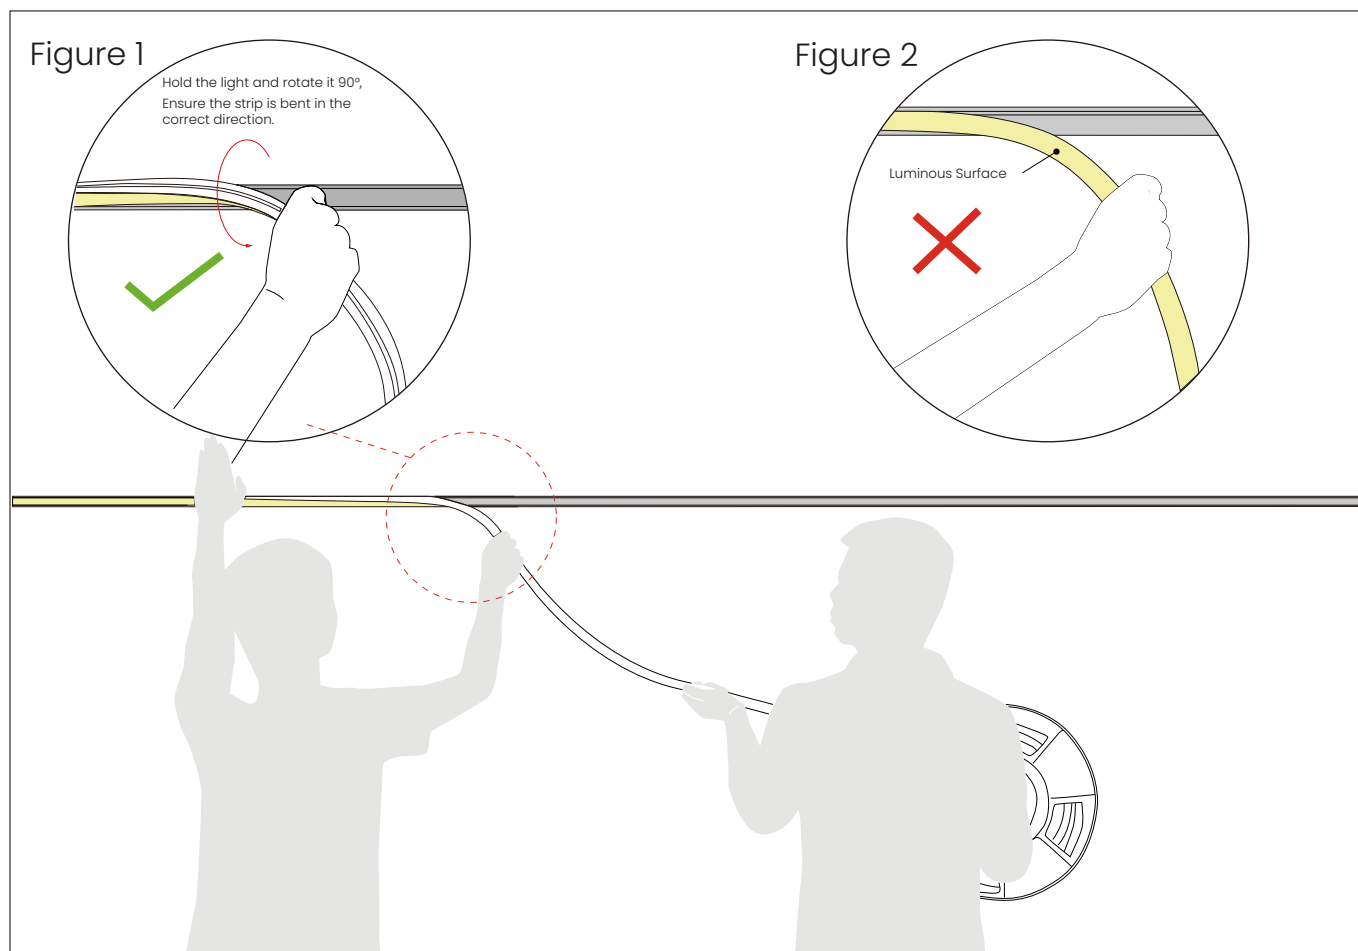
Installation Precautions--Side Mounted (# the length of the light is more than 2 meters, two people must work together to install it.)**1.Installer:**

- Press the light with the palm of the left hand to slowly load it into the slot. Use your right hand to guide the strip so it bends downward in the correct direction. See Figure 1.
- Do not bend the luminous surface to the side. See Figure 2.

2.Assistant:

- Cooperate with the installer to lift the reel of the light, and then slowly feed the strip to the installer, Do not pull or twist the light during the installation.

Installation Precautions--Side Mounted (If the length of the light is more than 5 meters, two people must work together to install it.)

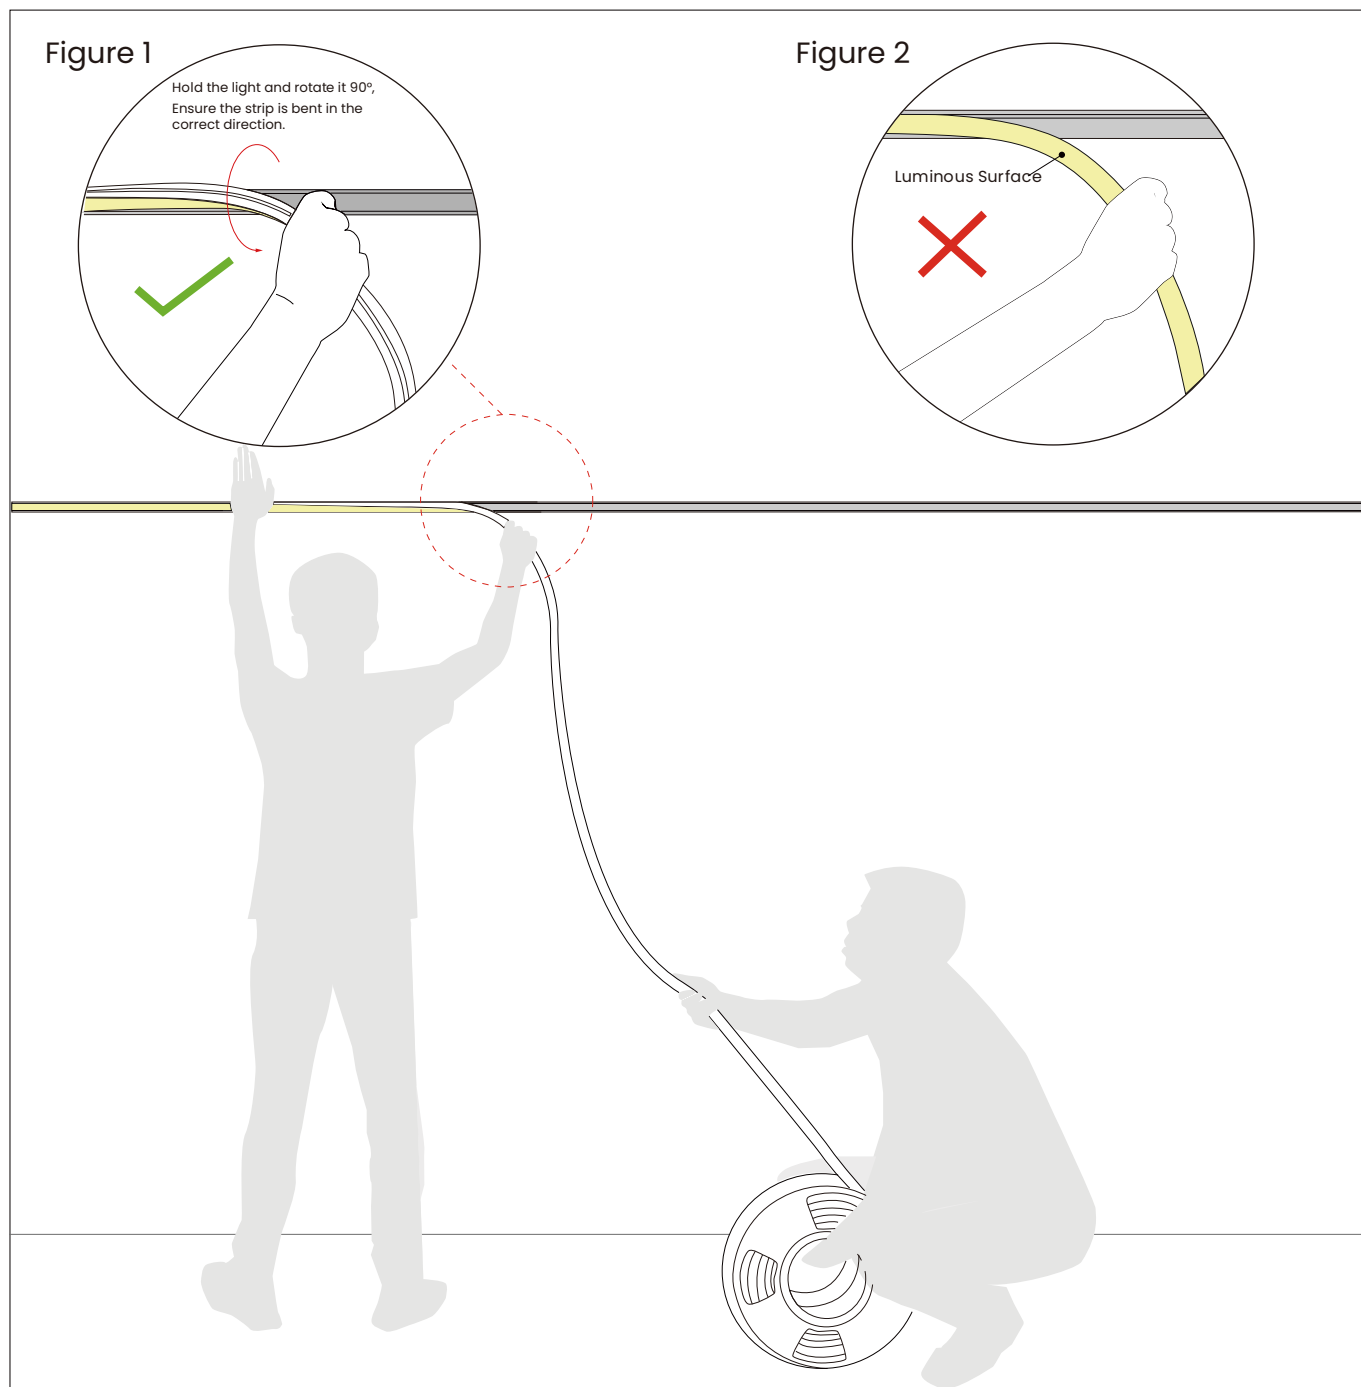


1.Installer:

- Press the light with the palm of the left hand to slowly load it into the slot. Use your right hand to guide the strip so it bends downward in the correct direction. See Figure 1.
- Do not bend the luminous surface to the side. See Figure 2.

2.Assistant:

- Cooperate with the installer to slowly feed the strip to the installer. Do not pull or twist the light during the installation.

Installation Precautions--Top Mounted (If the length of the light is more than 2 meters, two people must work together to install it.)

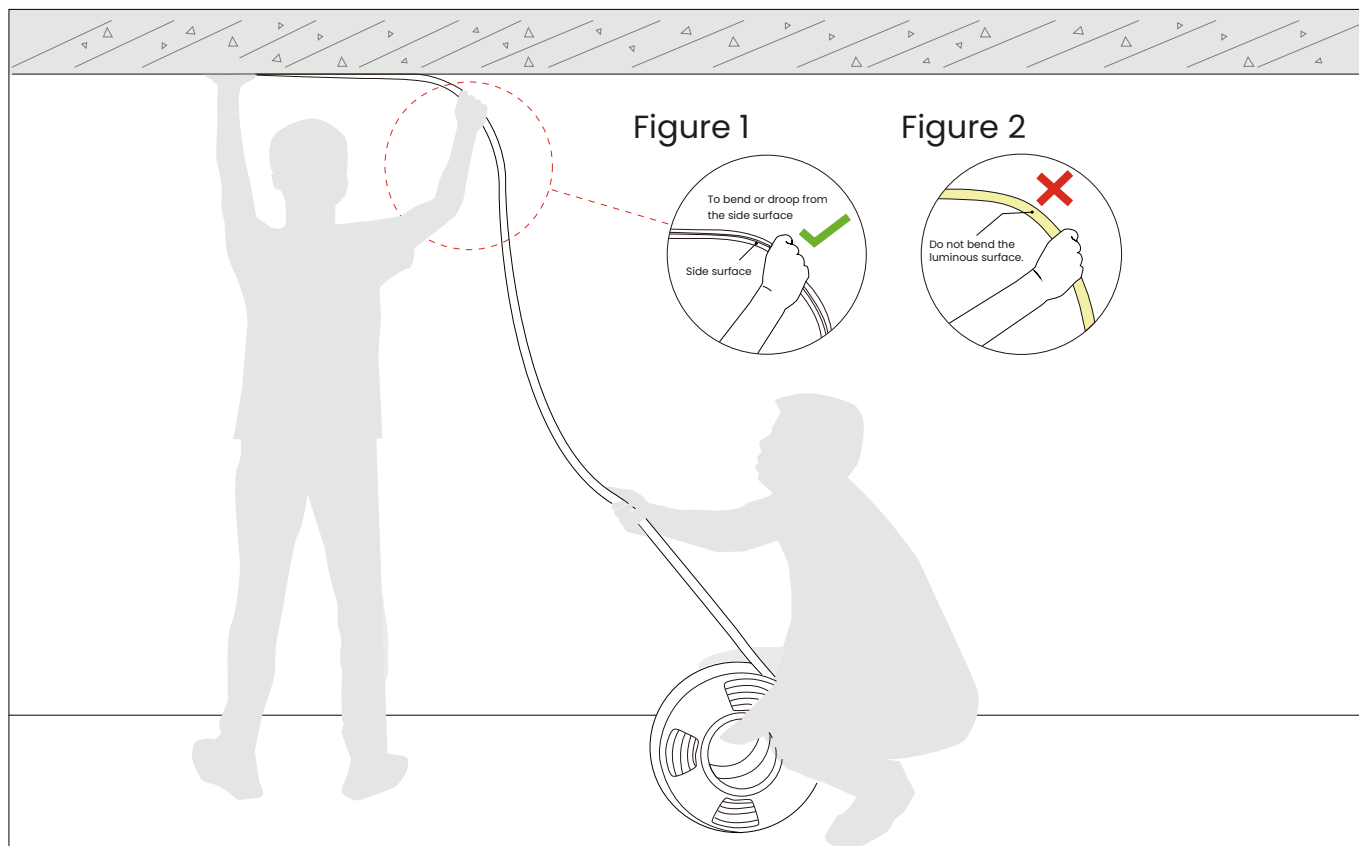

1.Installer:

- Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with your right hand so that it droop naturally. See Figure 1.
- luminous surface may not be bent. See Figure 2.

2.Assistant:

- Cooperate with the installer to slowly deliver the light to installer. Do not pull or twist the light during the installation.

Packaging Information



Standard Packaging: White carton with paper reel inside.

Model	Qty/Roll(m)	Rolls/Carton	Carton Size	Net Weight	Gross Weight
NA-T1607 AC230V IP65	5m	8	41 x 41 x 26 cm	11.8 kg/carton	13.2 kg/carton
NA-T1607 AC230V IP65	10m	3	41 x 41 x 26 cm	9.1 kg/carton	10.393 kg/carton
NA-T1607 AC230V IP65	20m	2	41 x 41 x 26 cm	12.7kg/carton	14.64 kg/carton
NA-T1607 AC230V IP65	30m	1	41 x 41 x 26 cm	9.1kg/carton	9.643 kg/carton

For reference only. Final packing information shall be subject to actual shipment.

Notes

Cable size at the power-supply output depends on the total load current and cable length. Select the cable according to the table below.

Light Current	Cable Specification								
	L=1M	L=2M	L=4M	L=6M	L=8M	L=10M	L=12M	L=14M	L=16M
1A	AWG26	AWG23	AWG21	AWG18	AWG18	AWG17	AWG16	AWG15	AWG15
2A	AWG23	AWG21	AWG18	AWG16	AWG15	AWG14	AWG13	AWG12	AWG12
3A	AWG22	AWG18	AWG16	AWG14	AWG13	AWG12	AWG11	AWG11	AWG10
4A	AWG21	AWG18	AWG15	AWG13	AWG12	AWG11	AWG10	AWG9	AWG9
5A	AWG20	AWG17	AWG14	AWG12	AWG11	AWG10	AWG9	AWG9	AWG8
6A	AWG18	AWG16	AWG13	AWG11	AWG10	AWG9	AWG8	AWG8	AWG7
7A	AWG18	AWG15	AWG12	AWG11	AWG9	AWG8	AWG8	AWG7	AWG6
8A	AWG17	AWG15	AWG12	AWG10	AWG9	AWG8	AWG7	AWG7	AWG6
9A	AWG17	AWG14	AWG11	AWG10	AWG8	AWG7	AWG7	AWG6	AWG5
10A	AWG16	AWG14	AWG11	AWG9	AWG8	AWG7	AWG6	AWG6	AWG5

- ※ The unused light should be sealed with the packaging bag to avoid prolonged exposure.
- ※ Use a AC230V isolated constant-voltage power supply with ripple below 5%. Using other types of power supply may damage the light or cause other safety risks.
- ※ In practical application, Reserve at least 20% power-supply headroom.
- ※ It is recommended that professionals connect the power supply. Do not connect the power supply with live power to avoid electric shock.
- ※ Please confirm whether the voltage of the power supply is consistent with the voltage of the light; Pay attention to the positive and negative poles of the power cord, Do not reverse polarity, so as not to cause product damage;
- ※ When multiple power supplies are used, ensure that the positive poles of the power supply are not connected in parallel. Otherwise, the power supply system may be unstable or damaged after long-term operation.
- ※ If the actual application length exceeds the specified length, it may cause overload, overheating, and uneven brightness of the light.
- ※ During installation, please do not scratch, twist, or bend the light irregularly. Otherwise, the light may be damaged beyond repair.
- ※ To ensure the life and reliability of the light, please do not over bend the light, which will damage the product itself.
- ※ To protect your eyes, please avoid staring at the glowing surface of the light for a long time.
- ※ Installation, disassembly, and maintenance must be performed by qualified personnel only.
- ※ Do not use any acidic or alkaline adhesive to fix the light (including but not limited to glass glue, etc.)
- ※ IP67 products are not suitable for long-term immersion in water; IP68 versions are factory-customized only. User cutting or processing may compromise IP68 protection.
- ※ Because of the difference in structure, even if the same color temperature value, products of different sizes may appear slightly different in color.

Tests showed that formaldehyde and benzene compounds can cause yellowing of silicone. In newly decorated interiors, epoxy floor paint, wall paint, wallpaper adhesive, decoration materials, and new furniture may release formaldehyde and benzene compounds. It is recommended to remove these substances first, or ventilate the area for a period before installing the silicone neon light, to avoid affecting the silicone body.