


SPECIFICATION SAUNA TOP BEND NEON

NHT-T1617 24V IP67




Features

- Using Dow Corning's high light transmittance, environmentally friendly silicone material, co-extrusion molding process, with heat and moisture resistance, can withstand high temperature and humid environment, specially designed for sauna environment;
- IP67 waterproof, ensure durability, prevent dust and water from entering, in the steam and heat, the lamp strip can continue to effectively illuminate the sauna space;
- Low voltage power supply, high safety;
- Using Lumileds leds, excellent performance, high temperature environment can also maintain stable work;
- A variety of colors are available, which can be compatible with the intelligent control system to achieve remote control and automatic adjustment, helping to create a peaceful and relaxing atmosphere, relieve stress and enhance the sauna experience;
- Ambient temperature: -25 °C ~105 °C, three-year warranty.

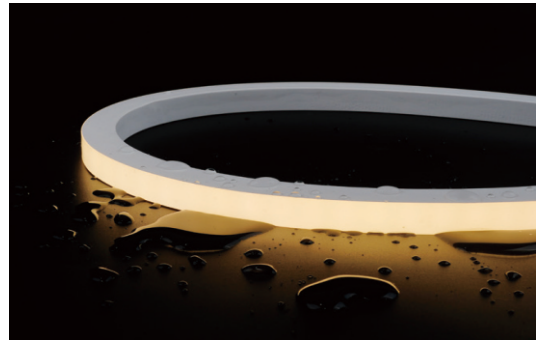

Dimensions(Unit:mm)

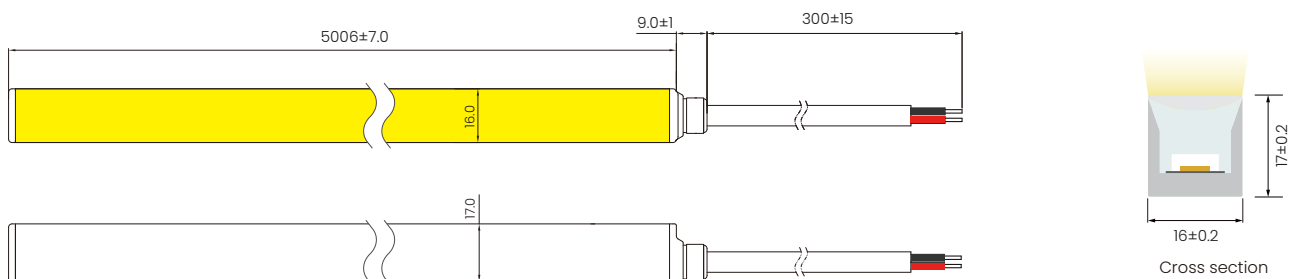

General Parameters

Voltage	DC24V
LED Solder-Point Temperature	Max. 120°C
Storage Temperature	-25°C~ 60°C
Ambient Temperature	Min.-25°C, Max (Table below)
CRI	see parameter tables


Power Ratings

Power(w/m)	5
Efficacy(lm/w)@4000K	95.5
Max Ambient Temperature	105°C


Due to the tolerance of the production and electrical components, output value and electrical power can vary up to 10%

Length Standard


Length Range (M)	Final Length(mm) Integral end cap	Tolerance (mm)
0M<Neon Strip(L)≤5M	L+6	±7




Vertical Bending



Min. Bending Diameter



Light Distribution Curve



Effective Average Illuminance

Note: The above data is based on 24V, 5W/M, single colour with 4000k colour temperature. If you need IES files for other types. Please contact our sales department.

Single Color : Model NHT-T1617V24-Cx-A

CCT(K)	SDCM	CRI	Voltage	Power(W/m)	Lumen (lm/m)	Efficiency (lm/w)	Unit Length (mm)	Max. Run Length (M)	CC/CV
2700K	≤3	≥90	DC24V	5	431	86.2	50	5	CV
3000K	≤3	≥90	DC24V	5	432	86.4	50	5	CV
3500K	≤3	≥90	DC24V	5	468	93.6	50	5	CV
4000K	≤3	≥90	DC24V	5	478	95.5	50	5	CV
5000K	≤4	≥90	DC24V	5	478	95.6	50	5	CV
6500K	≤5	≥90	DC24V	5	469	93.7	50	5	CV

Tunable White : Model NHT-T1617V24-Ca-A

CCT(K)	CRI	Voltage	Power(W/m)	Lumen (lm/m)	Efficiency (lm/w)	Unit Length (mm)	Max. Run Length (M)	CC/CV
2700K±150	≥90	DC24V	5	414	82.7	71.4	5	CV
6500K±500	≥90	DC24V	5	449	89.8	71.4	5	CV
2700K+6500K	≥90	DC24V	5	448	89.6	71.4	5	CV

RGBW : Model NHT-T1617V24-Crgbwx-A

CCT(K)	CRI	Voltage	Power(W/m)	Luminous Flux (lm/m)	Efficacy (lm/w)	Unit Length (mm)	Max. Run Length (M)	CC/CV
R	--	DC24V	2.5	88	35.0	83.3	5	CV
G	--	DC24V	2.5	271	108.4	83.3	5	CV
B	--	DC24V	2.5	52	20.7	83.3	5	CV
W:2700K ⁺¹⁰⁰ / ₋₂₀₀	≥80	DC24V	2.5	222	88.9	83.3	5	CV
RGBW	--	DC24V	10	640	64.0	83.3	5	CV

CCT(K)	CRI	Voltage	Power(W/m)	Luminous Flux (lm/m)	Efficacy (lm/w)	Unit Length (mm)	Max. Run Length (M)	CC/CV
R	--	DC24V	2.5	85	34.1	83.3	5	CV
G	--	DC24V	2.5	223	89.3	83.3	5	CV
B	--	DC24V	2.5	53	21.3	83.3	5	CV
W:3000K ⁺¹⁵⁰ / ₋₂₅₀	≥80	DC24V	2.5	230	91.9	83.3	5	CV
RGBW	--	DC24V	10	589	58.9	83.3	5	CV

CCT(K)	CRI	Voltage	Power(W/m)	Luminous Flux (lm/m)	Efficacy (lm/w)	Unit Length (mm)	Max. Run Length (M)	CC/CV
R	--	DC24V	2.5	73	29.3	83.3	5	CV
G	--	DC24V	2.5	243	97.3	83.3	5	CV
B	--	DC24V	2.5	53	21.2	83.3	5	CV
W:3200K ⁺²⁵⁰ / ₋₁₅₀	≥80	DC24V	2.5	235	93.8	83.3	5	CV
RGBW	--	DC24V	10	603	60.3	83.3	5	CV

RGBW : Model NHT-T1617V24-Crgbwx-A


CCT(K)	CRI	Voltage	Power(W/m)	Luminous Flux (lm/m)	Efficacy (lm/W)	Unit Length (mm)	Max. Run Length (M)	CC/CV
R	--	DC24V	2.5	86	34.5	83.3	5	CV
G	--	DC24V	2.5	276	110.2	83.3	5	CV
B	--	DC24V	2.5	57	22.9	83.3	5	CV
W:3700K±250	≥80	DC24V	2.5	239	95.5	83.3	5	CV
RGBW	--	DC24V	10	663	66.3	83.3	5	CV

CCT(K)	CRI	Voltage	Power(W/m)	Luminous Flux (lm/m)	Efficacy (lm/W)	Unit Length (mm)	Max. Run Length (M)	CC/CV
R	--	DC24V	2.5	77	30.6	83.3	5	CV
G	--	DC24V	2.5	234	93.7	83.3	5	CV
B	--	DC24V	2.5	50	20.1	83.3	5	CV
W:4500K±300	≥80	DC24V	2.5	222	88.9	83.3	5	CV
RGBW	--	DC24V	10	582	58.2	83.3	5	CV

CCT(K)	CRI	Voltage	Power(W/m)	Luminous Flux (lm/m)	Efficacy (lm/W)	Unit Length (mm)	Max. Run Length (M)	CC/CV
R	--	DC24V	2.5	82	32.6	83.3	5	CV
G	--	DC24V	2.5	253	101.0	83.3	5	CV
B	--	DC24V	2.5	52	20.7	83.3	5	CV
W:5700K±500	≥80	DC24V	2.5	228	91.1	83.3	5	CV
RGBW	--	DC24V	10	619	61.9	83.3	5	CV



- Maximum run length refers to the maximum length powered from one end using the standard 30 cm cable.
- The specified color temperature refers to the finished product.
- The values shown are typical. Due to production and component tolerances, light output and electrical power may vary by up to ±10%.
- All products can be dimmed; The dimmer voltage must match the rated voltage of the LED strip.
- The output frequency of the dimmer of the constant-current led light should be less than 2k Hz , and the output PWM can control the led light.

Cable Entry Directions

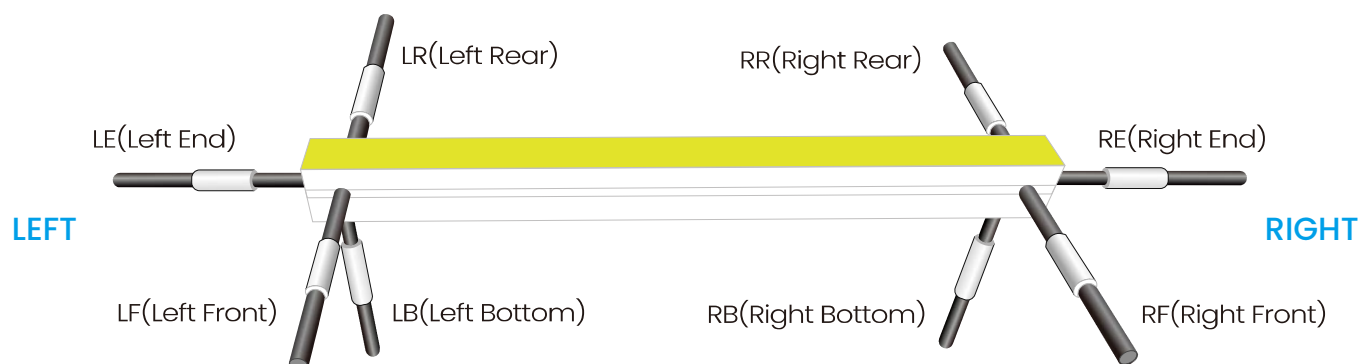


Cable Entry and End Cap Options (Unit: mm)


Integral End Cap (IP67)




Front Cable Entry



Side Cable Entry



Bottom Cable Entry




Closed End cap

Cables and Connectors

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
Silicone Cable		OD: 6.0mm / Inner core: 20AWG	●●	Red V+/Black V-
		OD: 6.0mm / Inner core: 20AWG	●○●	Black V+/White W/Yellow WW
		OD: 6.4 mm / Inner core: Red/Black--20AWG Green/Blue/White--22AWG	●○●●●	Black V+/White W/Blue B/Green G/Red R
Waterproof Connector with Silicone Cable		OD: 6.0 mm / Inner core: 20AWG M12 Male/Female Connector	●●	Red V+/Black V-
		OD: 6.0 mm / Inner core: 20AWG M12 Male/Female Connector	●○●	Black V+/White W/Yellow WW
		OD: 6.4 mm / Inner core: Red/Black--20AWG Green/Blue/White--22AWG M12 Male/Female Connector	●○●●●	Black V+/White W/Blue B/Green G/Red R


Cutting Mark

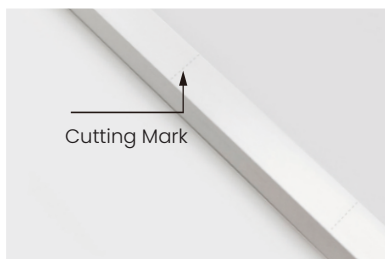

Remark:
The bottom marker is the cutting position




Use a professional cutting tool to cut vertically
at the cutting mark.



Please don't be feel free to cut and cut into an
oblique angle or cambered section.



Installation Accessories

PC Clip




Name	PC Clip
Dimension:	35x20x23.5mm
Accessories:	M3 × 16 mm (SUS304)

Aluminum Profile

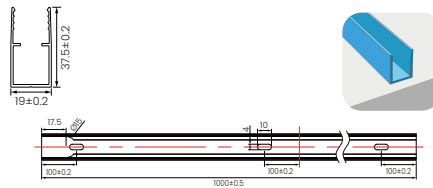


Name	Aluminum Profile
Dimension:	1000(±0.5)x19x37.5mm
Accessories:	M3 × 16 mm (SUS304)

PC Profile

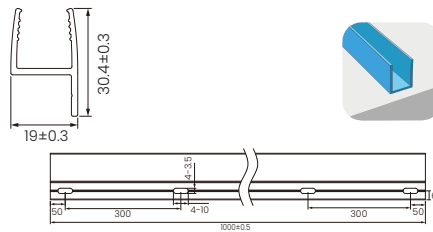

Name	PC Profile
Dimension:	1000(±0.5)x19x30.4mm
Accessories:	M3 × 16 mm (SUS304)


PC Profile

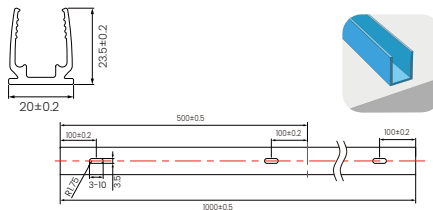


Name	PC Profile
Dimension:	1000(±0.5)x20x23.5mm
Accessories:	M3 × 16 mm (SUS304)

Single Color Connection Diagram


Non-dimmable

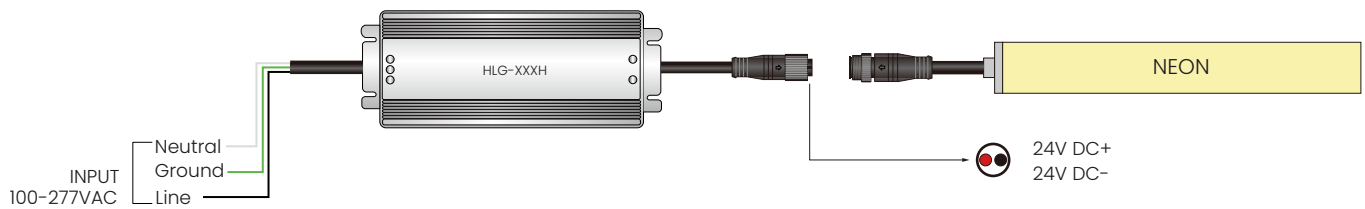


Phase-Cut / TRIAC Dimming

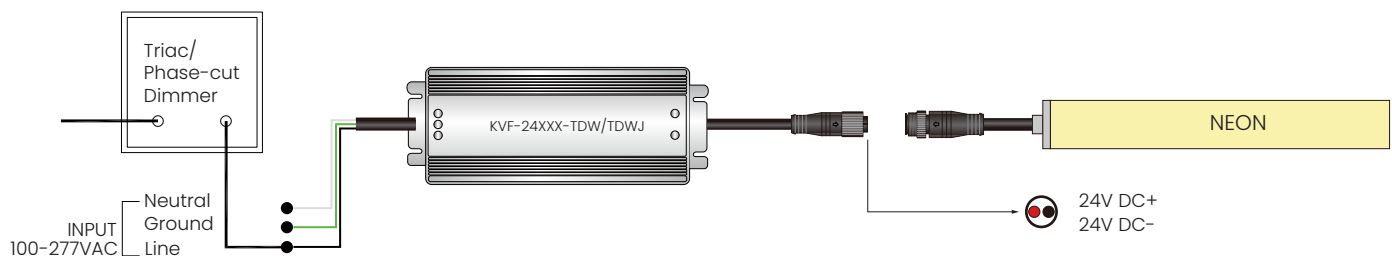


4-in-1 Dimming(0-10V/1-10V/Potentiometer/10V PWM)

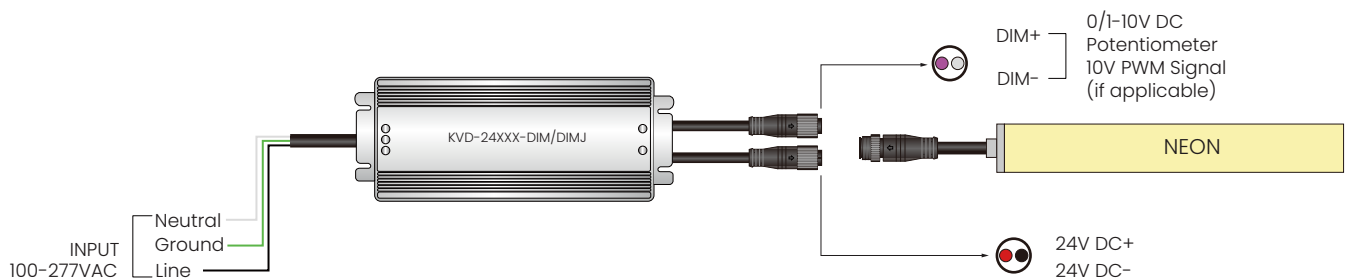


5-in-1 Dimming (Triac/0-10V/1-10V/Potentiometer/10V PWM)

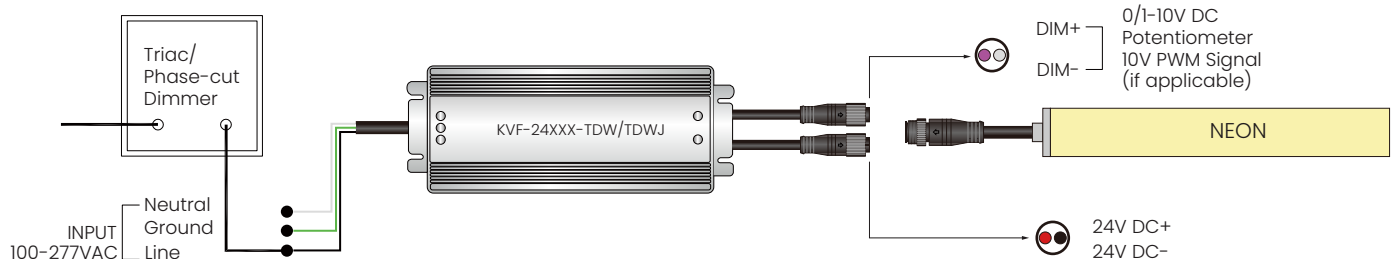



Tunable White Connection Diagram

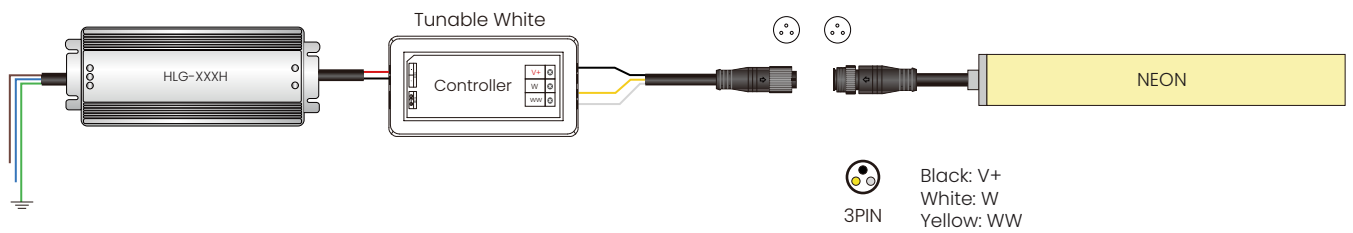


RGBW Connection Diagram

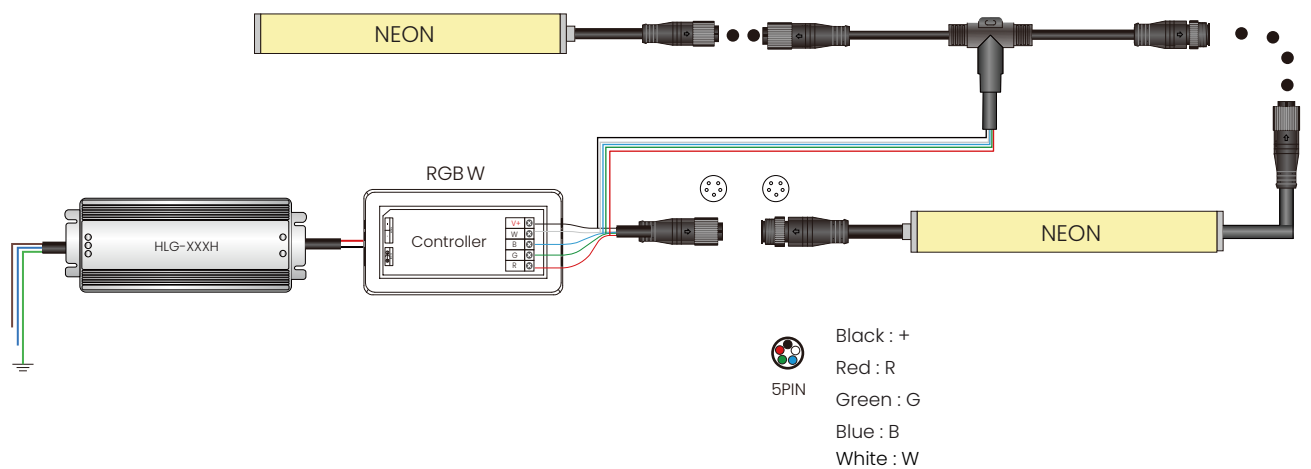


Installation Precautions

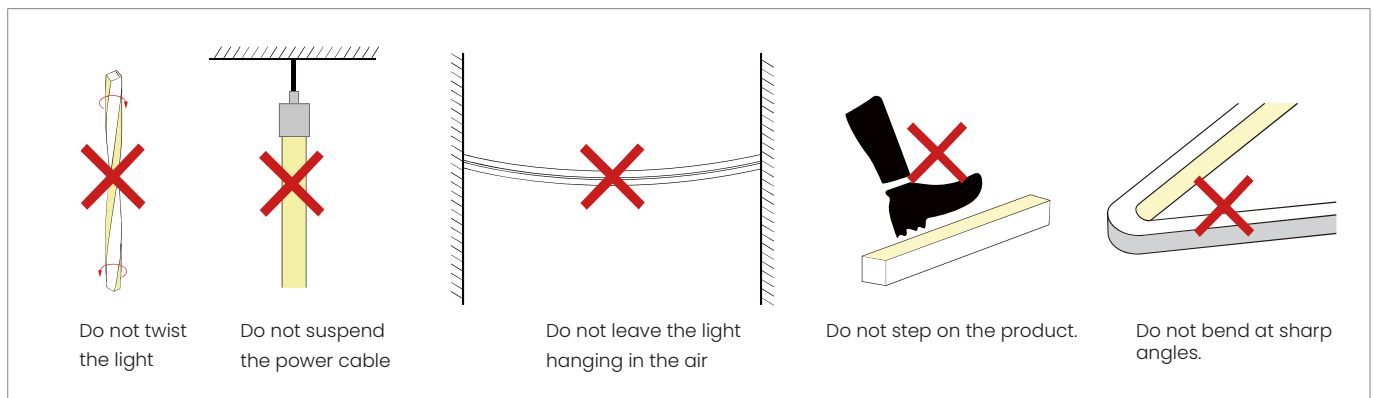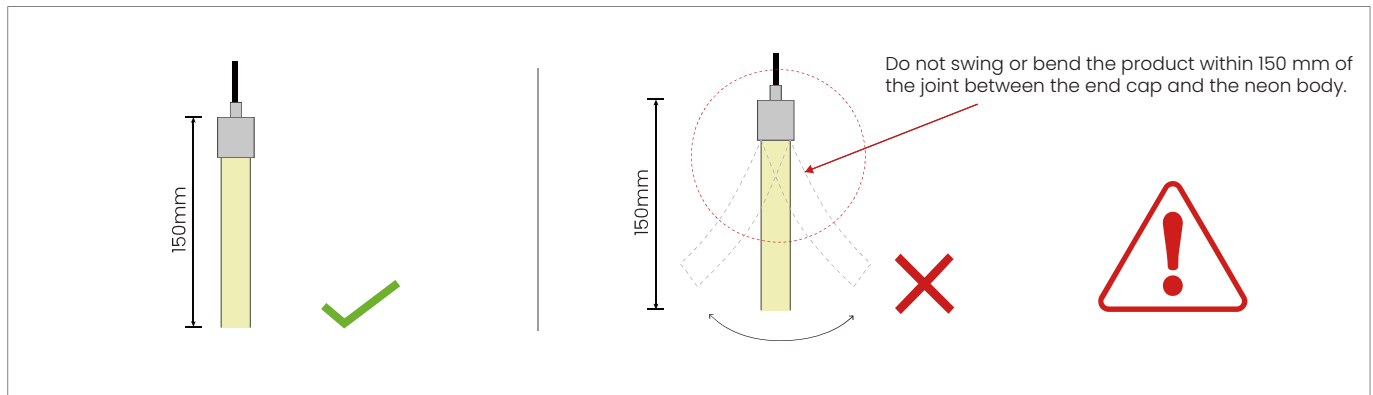

Insert into the Profile

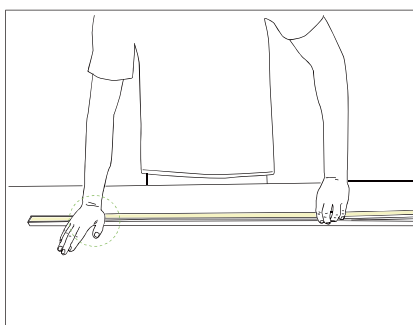


- Use your palm to slowly press the LED strip into the channel, then gently straighten it along the channel.
- Try to keep the led strip in a flat state during the installation process.

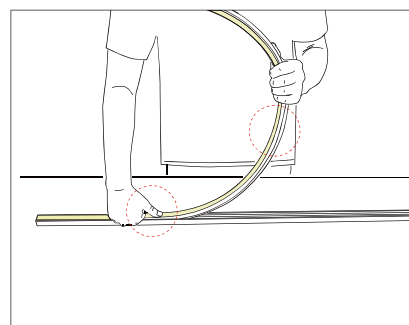

- Do not press the LED strip with one finger; this may damage internal components.
- The bent arc of the led strip should not be too large during installation.

Installation Precautions--Side Mounted (If the length of the light is more than 2 meters, two people must work together to install it.)

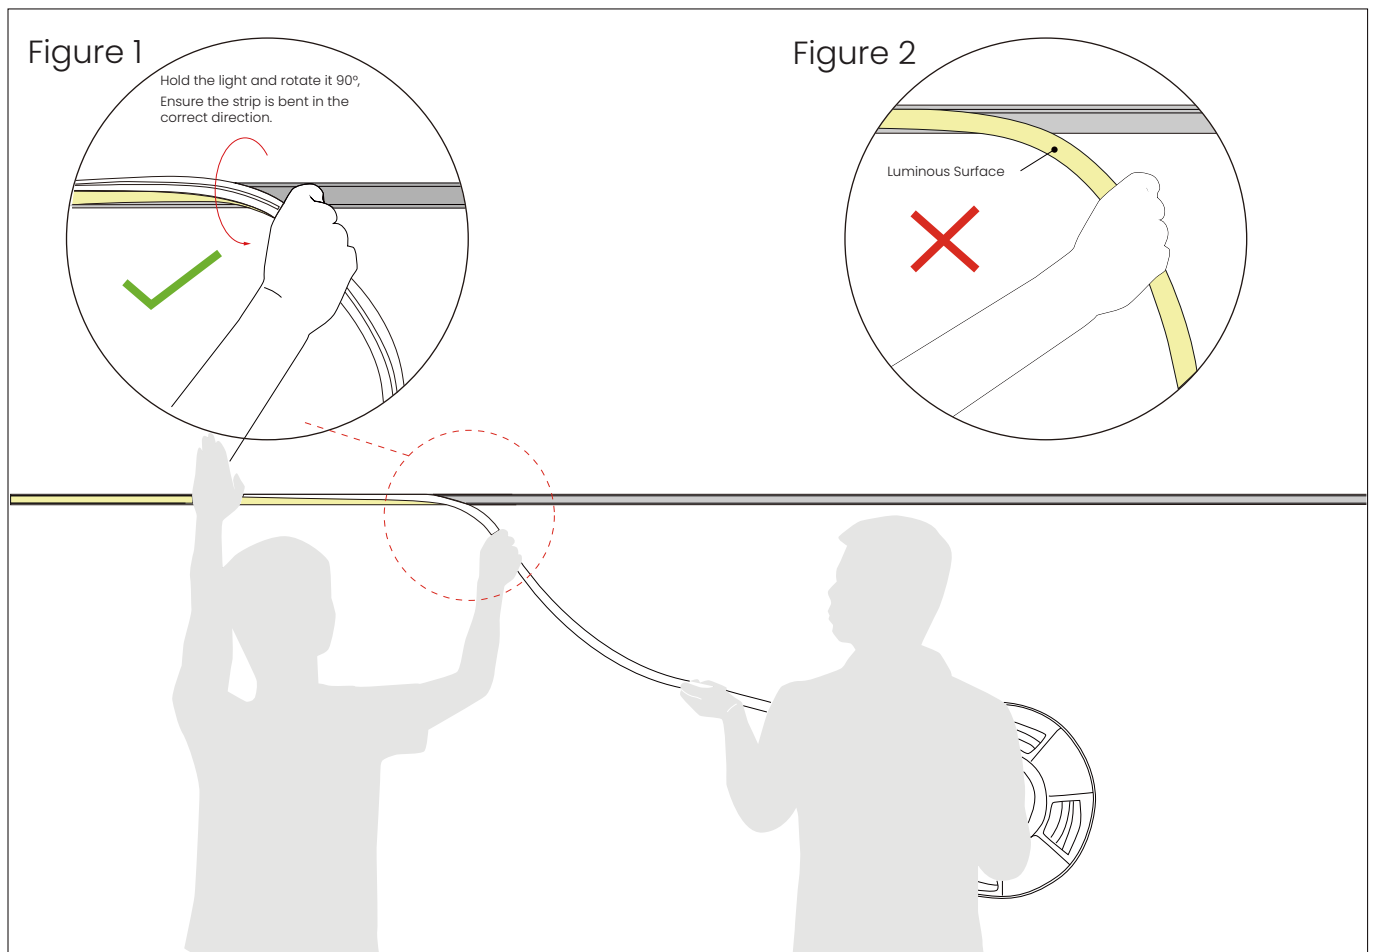


1.Installer:

- Press the light with the palm of the left hand to slowly load it into the slot. Use your right hand to guide the strip so it bends downward in the correct direction. See Figure 1.
- Do not bend the luminous surface to the side. See Figure 2.

2.Assistant:


- Cooperate with the installer to lift the reel of the light, and then slowly feed the strip to the installer, Do not pull or twist the light during the installation.

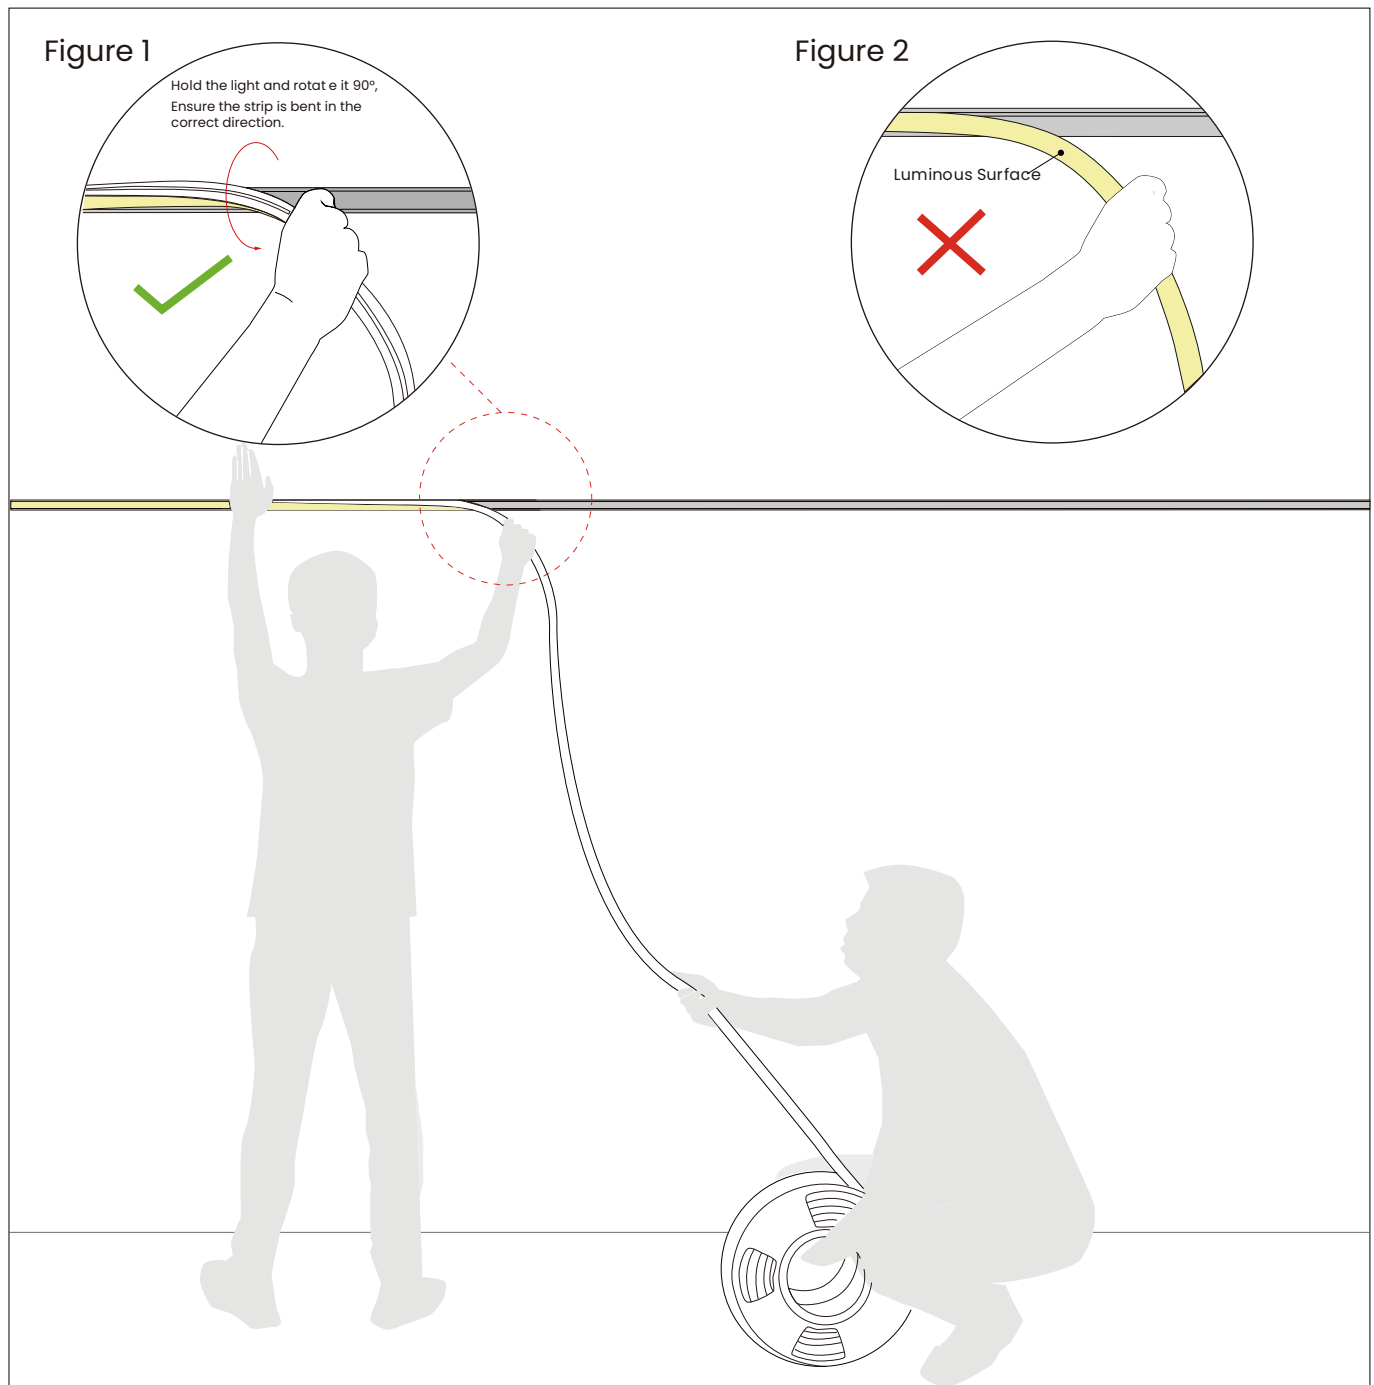Installation Precautions--Side Mounted (If the length of the light is more than 5 meters, two people must work together to install it.)**1.Installer:**

- Press the light with the palm of the left hand to slowly load it into the slot. Use your right hand to guide the strip so it bends downward in the correct direction. See Figure 1.
- Do not bend the luminous surface to the side. See Figure 2.

2.Assistant:

- Cooperate with the installer to slowly feed the strip to the installer. Do not pull or twist the light during the installation.

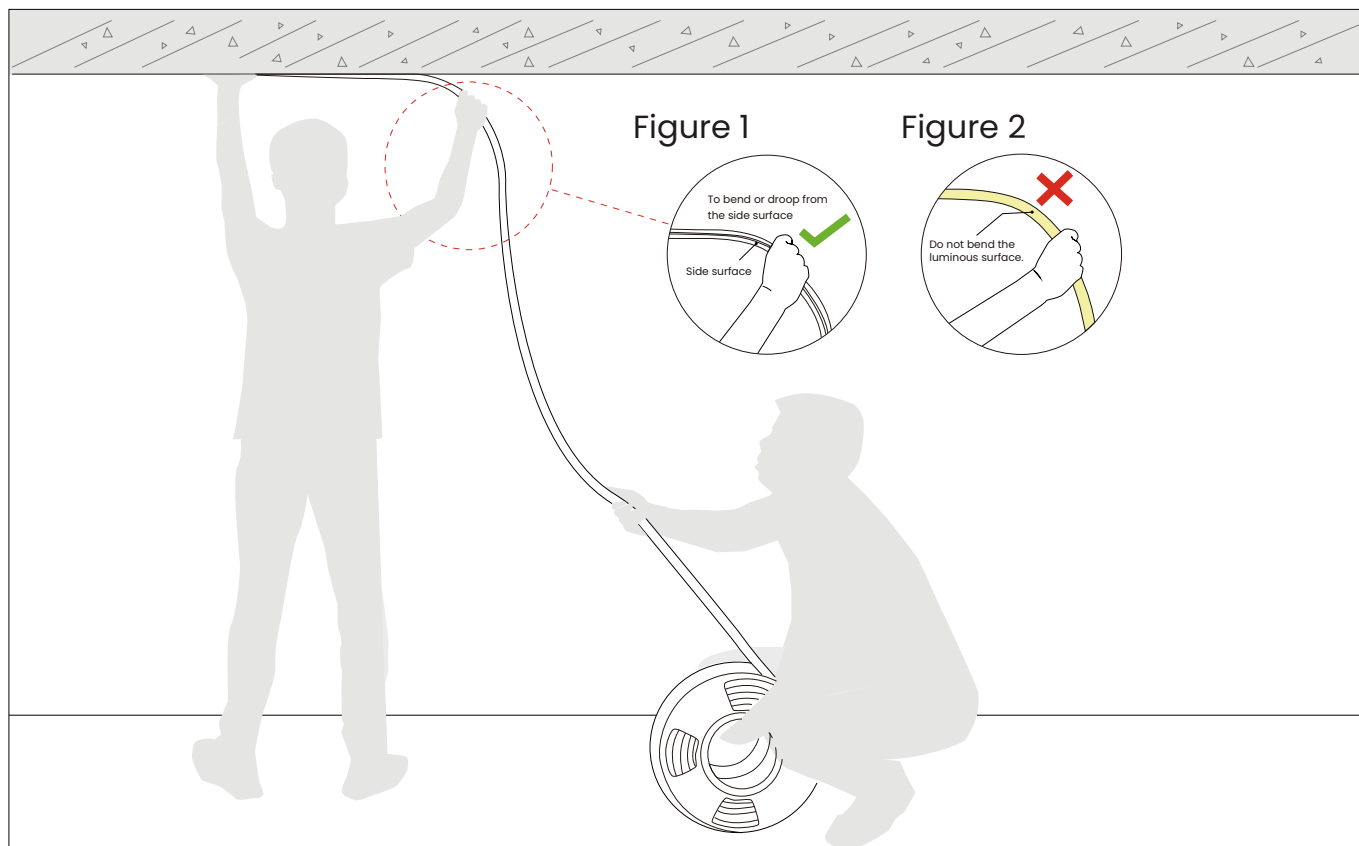Installation Precautions--Top Mounted (If the length of the light is more than 2 meters, two people must work together to install it.)**1.Installer:**

- Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with your right hand so that it droop naturally. See Figure 1.

2.Assistant:

- Cooperate with the installer to slowly deliver the light to installer. Do not pull or twist the light during the installation.

Packaging Information



Standard Packaging: White carton with paper reel inside.

Model	Qty/Roll(m)	Rolls/Carton	Carton Size	Net Weight	Gross Weight
NHT-T1617 24V IP67	5m	8	41 x 41 x 26 cm	11.8 kg/carton	13.2 kg/carton

For reference only. Final packing information shall be subject to actual shipment.

Notes

Cable size at the power-supply output depends on the total load current and cable length. Select the cable according to the table below.

Light Current	Cable Specification								
	L=1M	L=2M	L=4M	L=6M	L=8M	L=10M	L=12M	L=14M	L=16M
1A	AWG26	AWG23	AWG21	AWG18	AWG18	AWG17	AWG16	AWG15	AWG15
2A	AWG23	AWG21	AWG18	AWG16	AWG15	AWG14	AWG13	AWG12	AWG12
3A	AWG22	AWG18	AWG16	AWG14	AWG13	AWG12	AWG11	AWG11	AWG10
4A	AWG21	AWG18	AWG15	AWG13	AWG12	AWG11	AWG10	AWG9	AWG9
5A	AWG20	AWG17	AWG14	AWG12	AWG11	AWG10	AWG9	AWG9	AWG8
6A	AWG18	AWG16	AWG13	AWG11	AWG10	AWG9	AWG8	AWG8	AWG7
7A	AWG18	AWG15	AWG12	AWG11	AWG9	AWG8	AWG8	AWG7	AWG6
8A	AWG17	AWG15	AWG12	AWG10	AWG9	AWG8	AWG7	AWG7	AWG6
9A	AWG17	AWG14	AWG11	AWG10	AWG8	AWG7	AWG7	AWG6	AWG5
10A	AWG16	AWG14	AWG11	AWG9	AWG8	AWG7	AWG6	AWG6	AWG5

- ※ The unused light should be sealed with the packaging bag to avoid prolonged exposure.
- ※ Use a 24 V DC isolated constant-voltage power supply with ripple below 5%. Using other types of power supply may damage the light or cause other safety risks.
- ※ In practical application, Reserve at least 20% power-supply headroom.
- ※ It is recommended that professionals connect the power supply. Do not connect the power supply with live power to avoid electric shock.
- ※ Please confirm whether the voltage of the power supply is consistent with the voltage of the light; Pay attention to the positive and negative poles of the power cord, Do not reverse polarity, so as not to cause product damage;
- ※ When multiple power supplies are used, ensure that the positive poles of the power supply are not connected in parallel. Otherwise, the power supply system may be unstable or damaged after long-term operation.
- ※ If the actual application length exceeds the specified length, it may cause overload, overheating, and uneven brightness of the light.
- ※ During installation, please do not scratch, twist, or bend the light irregularly. Otherwise, the light may be damaged beyond repair.
- ※ To ensure the life and reliability of the light, please do not over bend the light, which will damage the product itself.
- ※ To protect your eyes, please avoid staring at the glowing surface of the light for a long time.
- ※ Installation, disassembly, and maintenance must be performed by qualified personnel only.
- ※ Do not use any acidic or alkaline adhesive to fix the light (including but not limited to glass glue, etc.)
- ※ IP67 products are not suitable for long-term immersion in water; IP68 versions are factory-customized only. User cutting or processing may compromise IP68 protection.
- ※ Because of the difference in structure, even if the same color temperature value, products of different sizes may appear slightly different in color.

Tests showed that formaldehyde and benzene compounds can cause yellowing of silicone. In newly decorated interiors, epoxy floor paint, wall paint, wallpaper adhesive, decoration materials, and new furniture may release formaldehyde and benzene compounds. It is recommended to remove these substances first, or ventilate the area for a period before installing the silicone neon light, to avoid affecting the silicone body.