

SPECIFICATION 3D BEND NEON

NS-3D1615 24V IP67



Features

- It is made of Dow Chemical SILASTIC™ ET-7021 silicone rubber, which provides high transparency and high strength.
- Environmental protection grade silicone material, integrated extrusion molding process.
- Unique optical light distribution structure design, uniform lighting surface and no shadow.
- IP67 protection level, salt solution resistance, acids & alkalis and UV resistance.
- Excellent toughness, simple and stylish appearance, delicate and unique.
- 3-5 years warranty, working life ≥50000 hours.


2100k
2400k
2700k
3000k
3500k
4000k
5000k
6500k

2700k
~
6500k

R G B Y P RGB



Dimensions(Unit:mm)

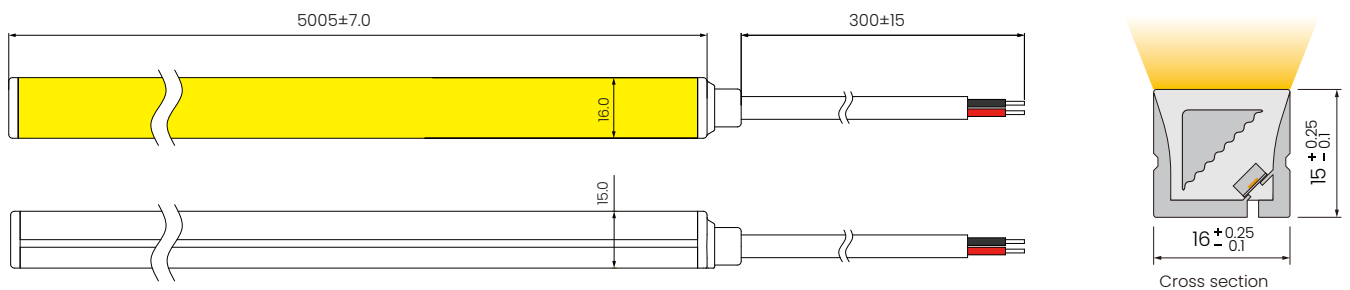

General Parameters

Voltage	DC24V
LED Solder-Point Temperature	Max. 65°C
Storage Temperature	-25°C~ 60°C
Ambient Temperature	Min.-25°C, Max (Table below)
CRI	see parameter tables

Power Ratings


Power (w/m)	10
Efficacy(lm/W)@4000K	73
Max Ambient Temperature	45°C

Due to the tolerance of the production and electrical components, output value and electrical power can vary up to 10%

Length Standard


Length Range (M)	Final Length(mm) Integral end cap	Final Length(mm) Silicone end cap	Tolerance (mm)
0M<Neon Strip(L)≤5M	L+5	L+5.5	±7

Single color


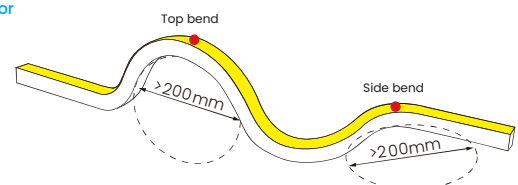


Note: Min bending diameter of Top bend>200mm
Min bending diameter of Side bend>200mm

Tunable White/RGB

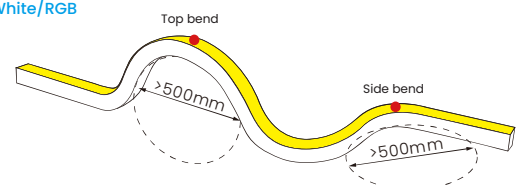

Note: Min bending diameter of Top bend>500mm
Min bending diameter of Side bend>500mm



Note: The above data is based on 24V ,10W/M,single colour with 4000k colour temperature.
If you need IES files for other types.Please contact our sales department.

Single Color : Model NS-3DI6I5V24-Cx-C

CCT(K)	CRI	Voltage	Power(W/m)	Lumen (lm/m)	Efficiency (lm/w)	Unit Length (mm)	Max. Run Length (M)	CC/CV
2100K±150	≥90	DC24V	10	600	60	50	5	CV
2400K±150	≥90	DC24V	10	630	63	50	5	CV
2700K±150	≥90	DC24V	10	670	67	50	5	CV
3000K±150	≥90	DC24V	10	700	70	50	5	CV
3500K±200	≥90	DC24V	10	730	73	50	5	CV
4000K ⁺⁴⁰⁰ ₋₂₀₀	≥90	DC24V	10	730	73	50	5	CV
5000K ⁺⁵⁰⁰ ₋₃₀₀	≥90	DC24V	10	750	75	50	5	CV
6500K±500	≥90	DC24V	10	730	73	50	5	CV
Red	--	DC24V	10	310	31	50	5	CV
Green	--	DC24V	10	530	53	50	5	CV
Blue	--	DC24V	10	140	14	50	5	CV
Yellow	--	DC24V	10	260	26	50	5	CV
Pink	--	DC24V	10	480	48	50	5	CV

Tunable White : Model NS-3DI6I5V24-Ca-C


CCT(K)	CRI	Voltage	Power(W/m)	Lumen (lm/m)	Efficiency (lm/w)	Unit Length (mm)	Max. Run Length (M)	CC/CV
2700K±150	≥90	DC24V	5	245	49.0	50	5	CV
6500K±500	≥90	DC24V	5	275	55.0	50	5	CV
2700K+6500K	≥90	DC24V	10	520	52.0	50	5	CV

RGB : Model NS-3DI6I5V24-Crgb-C

CCT(K)	CRI	Voltage	Power(W/m)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max. Run Length (M)	CC/CV
R	--	DC24V	3.3	66	20.0	50	5	CV
G	--	DC24V	3.3	188	57.0	50	5	CV
B	--	DC24V	3.3	30	9.2	50	5	CV
RGB	--	DC24V	10	280	28.0	50	5	CV



- Maximum run length refers to the maximum length powered from one end using the standard 30 cm cable.
- The specified color temperature refers to the finished product.
- The values shown are typical. Due to production and component tolerances, light output and electrical power may vary by up to ±10%.
- All products can be dimmed; The dimmer voltage must match the rated voltage of the LED strip.
- The output frequency of the dimmer of the constant-current led light should be less than 2k Hz , and the output PWM can control the led light.

Cable Entry Directions


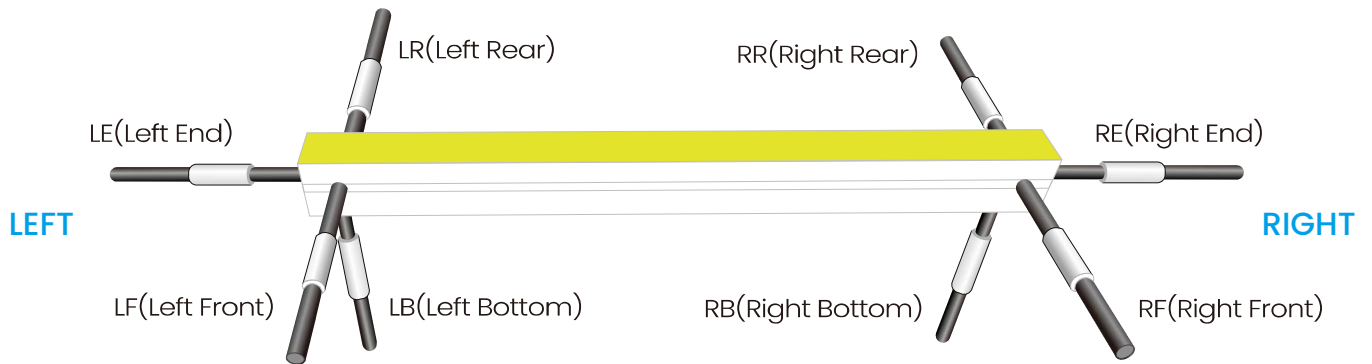


Cable Entry and End Cap Options (Unit: mm)



Silicone End Cap (IP67)




Front Cable Entry



Side Cable Entry





Bottom Cable Entry




Closed End Cap


Integral End Cap (IP67)




Front Cable Entry



Side Cable Entry





Bottom Cable Entry




Closed End Cap

Cables and Connectors

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
PVC Cable		OD: 5.0 mm / Inner core: 20AWG		Red V+/Black V-
		OD: 5.0 mm / Inner core: 20AWG		Brown V+/White W/Yellow WW
		OD: 5.5 mm / Inner core: 20AWG		Black V+/Blue B/Green G/Red R
Waterproof Connector with PVC Cable		OD: 5.0 mm / Inner core: 20AWG M12 Male/Female Connector		Red V+/Black V-
		OD: 5.0 mm / Inner core: 20AWG M12 Male/Female Connector		Brown V+/White W/Yellow WW
		OD: 5.5 mm / Inner core: 20AWG M12 Male/Female Connector		Black V+/Blue B/Green G/Red R
Silicone Cable		OD: 6.0mm / Inner core: 20AWG		Red V+/Black V-
		OD: 6.0mm / Inner core: 20AWG		Black V+/White W/Yellow WW
		OD: 6.0mm / Inner core: 20AWG		Black V+/Blue B/Green G/Red R
Waterproof Connector with Silicone Cable		OD: 6.0 mm / Inner core: 20AWG M12 Male/Female Connector		Red V+/Black V-
		OD: 6.0 mm / Inner core: 20AWG M12 Male/Female Connector		Black V+/White W/Yellow WW
		OD: 6.0 mm / Inner core: 20AWG M12 Male/Female Connector		Black V+/Blue B/Green G/Red R


Cutting Mark

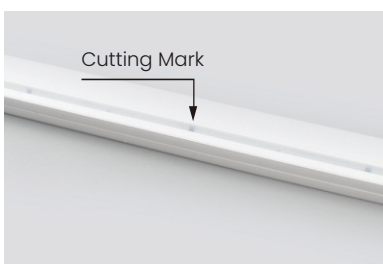

Remark:
The bottom of the LED strip has a transparent window. The black mark indicates the cutting position.





Use a professional cutting tool to cut vertically at the cutting mark.



Please don't be feel free to cut and cut into an oblique angle or cambered section.



Installation Accessories

Mounting Clips





Name	Mounting Clips
Dimension:	20x16.6x12.4mm
Accessories:	M3 × 16 mm (SUS304)

Aluminum Mounting Clips




Name	Aluminum Mounting Clips
Dimension:	20x20.5x17.6mm
Accessories:	M3 × 16 mm (SUS304)

Aluminum Profile




Name	Aluminum Profile
Dimension:	1000(±0.5)x18.1x18.9mm
Accessories:	M3 × 16 mm (SUS304)

Internal Gear Profile

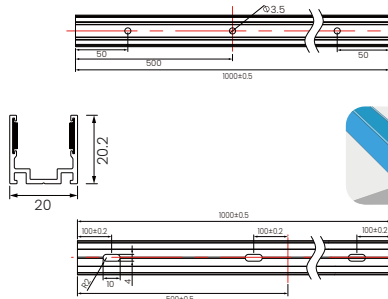



Name	Internal Gear Profile
Dimension:	1000(±0.5)x20x20.2mm
Accessories:	M3 × 16 mm (SUS304)

PC Profile





Name	PC Profile
Dimension:	1000(±0.5)x19.5x18.9mm
Accessories:	M3 × 16 mm (SUS304)

Curved Profile



Name	Curved Profile
Dimension:	1000(±0.5)x18.1x18.9mm
Accessories:	M3 × 16 mm (SUS304)



Curved Profile



Name	Curved Profile
Dimension:	1000(±0.5)x18.1x18.9mm
Accessories:	M3 × 16 mm (SUS304)



Installation Accessories

Curved Profile

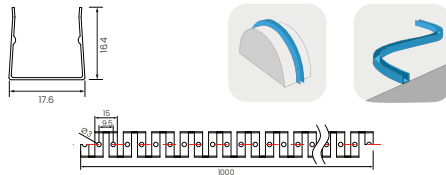


Name	Curved Profile
Dimension:	1000x17.6x16.4mm
Accessories:	M3 × 16 mm (SUS304)

Curved Profile

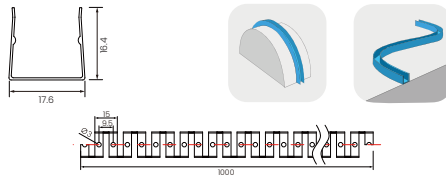

Name	Curved Profile
Dimension:	1000x17.6x16.4mm
Accessories:	M3 × 16 mm (SUS304)


Adjustable Angle Clip (use with aluminum clips or profile)

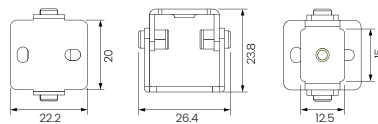


Dimension:	22.2x26.4x23.8mm
Accessories:	Screw M3x25mm(SUS304)/M3.5x8mm(SUS304)

Single Color Connection Diagram


Non-dimmable

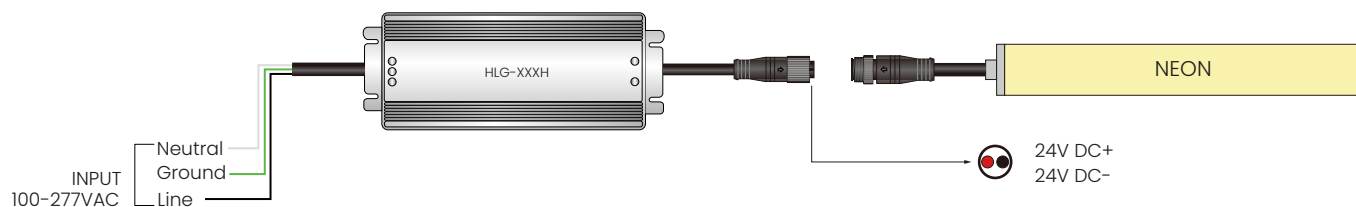


Phase-Cut / TRIAC Dimming

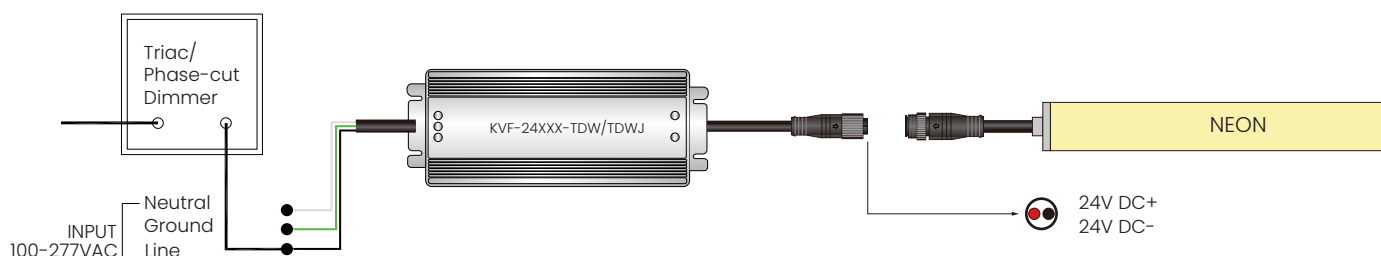


4-in-1 Dimming(0-10V/1-10V/Potentiometer/10V PWM)

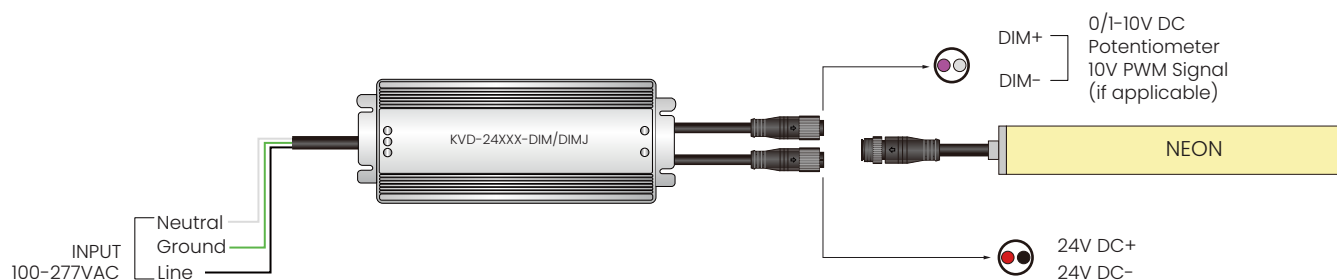


5-in-1 Dimming (Triac/0-10V/1-10V/Potentiometer/10V PWM)

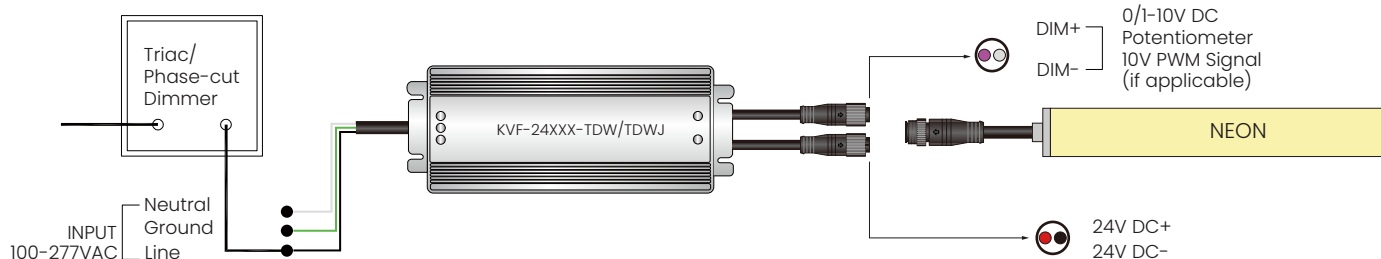



Tunable White Connection Diagram

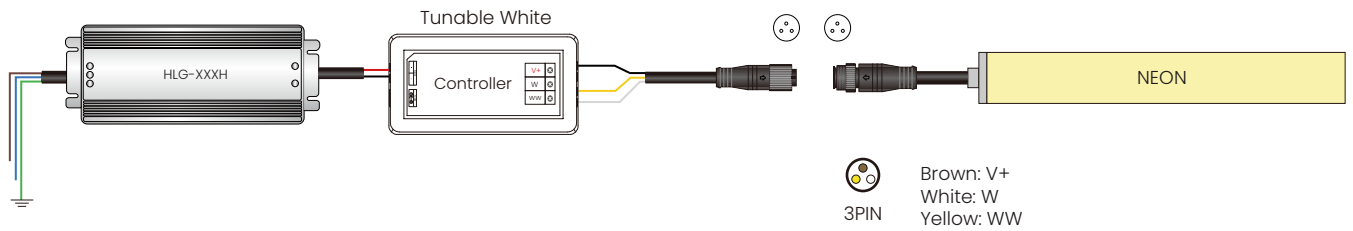


RGB Connection Diagram

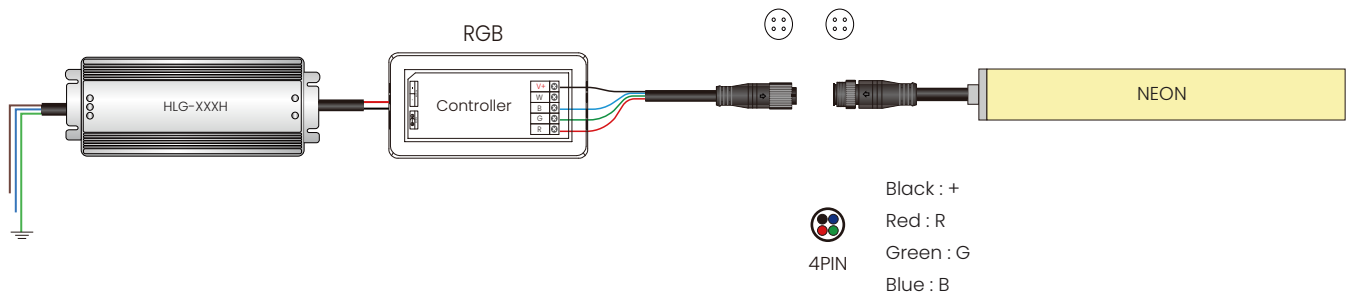


Installation Precautions

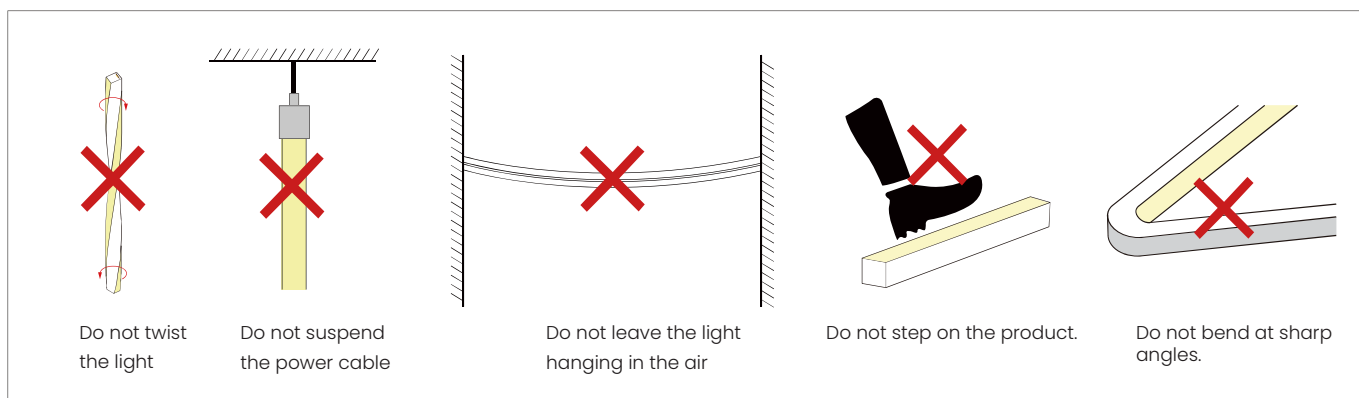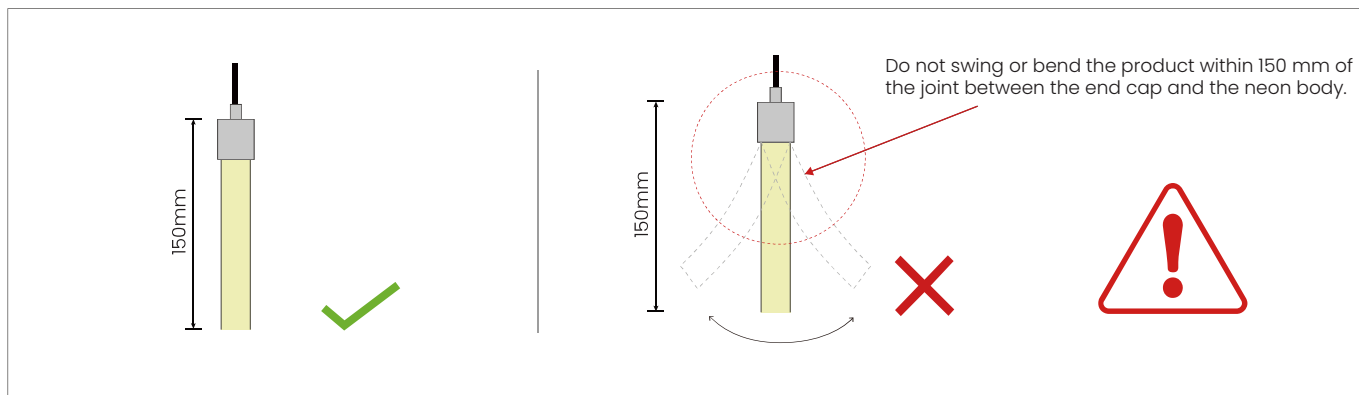

Insert into the Profile

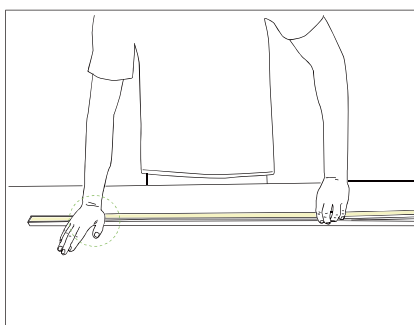

- Use your palm to slowly press the LED strip into the channel, then gently straighten it along the channel.
- Try to keep the led strip in a flat state during the installation process.

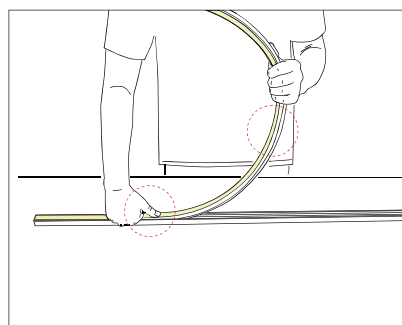

- Do not press the LED strip with one finger; this may damage internal components.
- The bent arc of the led strip should not be too large during installation.

Packaging Information



Standard Packaging: White carton with paper reel inside.

Model	Qty/Roll(m)	Rolls/Carton	Carton Size	Net Weight	Gross Weight
NS-3D1615 24V IP67	5m	8	41 x 41 x 26 cm	11.8 kg/carton	13.2 kg/carton

For reference only. Final packing information shall be subject to actual shipment.

Notes

Cable size at the power-supply output depends on the total load current and cable length. Select the cable according to the table below.

Light Current	Cable Specification								
	L=1M	L=2M	L=4M	L=6M	L=8M	L=10M	L=12M	L=14M	L=16M
1A	AWG26	AWG23	AWG21	AWG18	AWG18	AWG17	AWG16	AWG15	AWG15
2A	AWG23	AWG21	AWG18	AWG16	AWG15	AWG14	AWG13	AWG12	AWG12
3A	AWG22	AWG18	AWG16	AWG14	AWG13	AWG12	AWG11	AWG11	AWG10
4A	AWG21	AWG18	AWG15	AWG13	AWG12	AWG11	AWG10	AWG9	AWG9
5A	AWG20	AWG17	AWG14	AWG12	AWG11	AWG10	AWG9	AWG9	AWG8
6A	AWG18	AWG16	AWG13	AWG11	AWG10	AWG9	AWG8	AWG8	AWG7
7A	AWG18	AWG15	AWG12	AWG11	AWG9	AWG8	AWG8	AWG7	AWG6
8A	AWG17	AWG15	AWG12	AWG10	AWG9	AWG8	AWG7	AWG7	AWG6
9A	AWG17	AWG14	AWG11	AWG10	AWG8	AWG7	AWG7	AWG6	AWG5
10A	AWG16	AWG14	AWG11	AWG9	AWG8	AWG7	AWG6	AWG6	AWG5

- ※ The unused light should be sealed with the packaging bag to avoid prolonged exposure.
- ※ Use a 24 V DC isolated constant-voltage power supply with ripple below 5%. Using other types of power supply may damage the light or cause other safety risks.
- ※ In practical application, Reserve at least 20% power-supply headroom.
- ※ It is recommended that professionals connect the power supply. Do not connect the power supply with live power to avoid electric shock.
- ※ Please confirm whether the voltage of the power supply is consistent with the voltage of the light; Pay attention to the positive and negative poles of the power cord, Do not reverse polarity, so as not to cause product damage;
- ※ When multiple power supplies are used, ensure that the positive poles of the power supply are not connected in parallel. Otherwise, the power supply system may be unstable or damaged after long-term operation.
- ※ If the actual application length exceeds the specified length, it may cause overload, overheating, and uneven brightness of the light.
- ※ During installation, please do not scratch, twist, or bend the light irregularly. Otherwise, the light may be damaged beyond repair.
- ※ To ensure the life and reliability of the light, please do not over bend the light, which will damage the product itself.
- ※ To protect your eyes, please avoid staring at the glowing surface of the light for a long time.
- ※ Installation, disassembly, and maintenance must be performed by qualified personnel only.
- ※ Do not use any acidic or alkaline adhesive to fix the light (including but not limited to glass glue, etc.)
- ※ IP67 products are not suitable for long-term immersion in water; IP68 versions are factory-customized only. User cutting or processing may compromise IP68 protection.
- ※ Because of the difference in structure, even if the same color temperature value, products of different sizes may appear slightly different in color.

Tests showed that formaldehyde and benzene compounds can cause yellowing of silicone. In newly decorated interiors, epoxy floor paint, wall paint, wallpaper adhesive, decoration materials, and new furniture may release formaldehyde and benzene compounds. It is recommended to remove these substances first, or ventilate the area for a period before installing the silicone neon light, to avoid affecting the silicone body.