

SPECIFICATION LONG RUN NEON

NS-S1617LR 24V IP67




Features

- LONG RUN is an IP67-rated, co-extruded silicone neon flex with excellent UV resistance, chemical stability, and abrasion resistance.
- Horizontal bending with uniform light and dimmable function.
- Production Length is up to 30m.
- Support freely configurable in length by small cutting increments.
- Matt treatment optional for smooth surface and resistant to dust, the SDCM of finished product can be minimized to 3 steps.
- 3-5-year warranty, long-life LED > 50,000 hrs, 1 Bin.



Dimensions(Unit:mm)

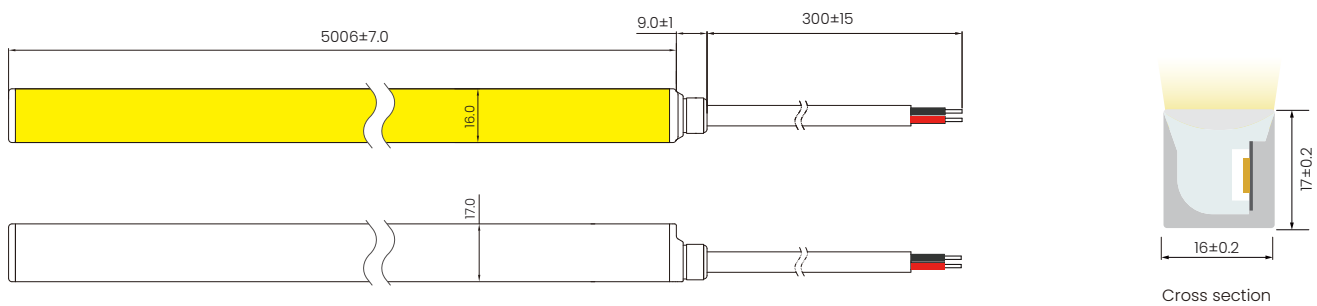

General Parameters

Voltage	DC24V
LED Solder-Point Temperature	Max. 65°C
Storage Temperature	-25°C~ 60°C
Ambient Temperature	Min.-25°C, Max (Table below)
CRI	see parameter tables





Power Ratings

Power(w/m)	10
Efficacy(lm/w)@4000K	59.1
Max Ambient Temperature	45°C

Due to the tolerance of the production and electrical components, output value and electrical power can vary up to 10%

Length Standard

Length Range (M)	Final Length(mm) Integral end cap	Tolerance (mm)
0M<Neon Strip(L)≤5M	L+6	±7
5M<Neon Strip(L)≤10M	L+6	±10
10M<Neon Strip(L)≤15M	L+6	±13
15M<Neon Strip(L)≤20M	L+6	±16
20M<Neon Strip(L)≤24M	L+6	±19




Note: The above data is based on 24V, 10W/M, single colour with 4000k colour temperature. If you need IES files for other types, please contact our sales department.

Single Color : Model NS-S1617LRV24-CCx-S

CCT(K)	SDCM	CRI	Voltage	Power(W/m)	Luminous Flux (lm/m)	Efficacy (lm/W)	Unit Length (mm)	Max. Run Length (M)	CC/CV
1800K±100	--	≥90	DC24V	10	403	40.3	50	24	CC
2100K±150	--	≥90	DC24V	10	449	44.9	50	24	CC
2400K±150	--	≥90	DC24V	10	489	48.9	50	24	CC
2700K	≤3	≥90	DC24V	10	528	52.8	50	24	CC
3000K	≤3	≥90	DC24V	10	555	55.5	50	24	CC
3500K	≤3	≥90	DC24V	10	570	57.0	50	24	CC
4000K	≤3	≥90	DC24V	10	591	59.1	50	24	CC
5000K	≤4	≥90	DC24V	10	588	58.8	50	24	CC
6500K	≤5	≥90	DC24V	10	580	58.0	50	24	CC


- Maximum run length refers to the maximum length powered from one end using the standard 30 cm cable.
- The specified color temperature refers to the finished product.
- The values shown are typical. Due to production and component tolerances, light output and electrical power may vary by up to ±10%.
- All products can be dimmed; The dimmer voltage must match the rated voltage of the LED strip.
- The output frequency of the dimmer of the constant-current led light should be less than 2k Hz , and the output PWM can control the led light.

Cable Entry Directions

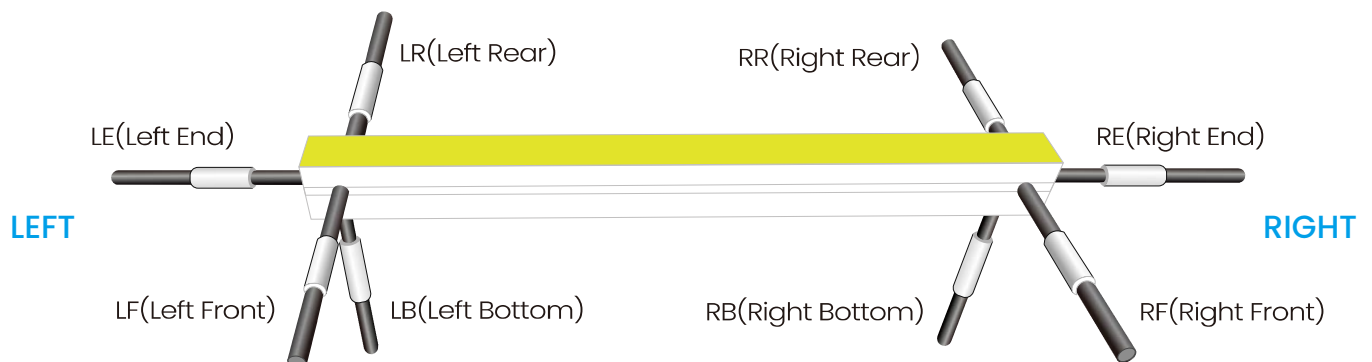


Cable Entry and End Cap Options (Unit: mm)


Integral End Cap (IP67)




Front Cable Entry



Side Cable Entry



Bottom Cable Entry




Closed End cap

Cables and Connectors

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
Silicone Cable		OD: 6.8 mm / Inner core: 2X16AWG	● ●	Red V+/Black V-
Waterproof Connector with Silicone Cable		OD: 6.8 mm / Inner core: 2X16AWG M12 Male/Female Connector	● ●	Red V+/Black V-


Cutting Mark

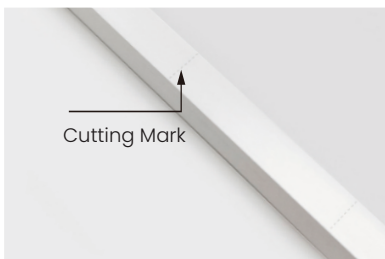









Remark:
The bottom marker is the cutting position



Use a professional cutting tool to cut vertically
at the cutting mark.




Please don't be feel free to cut and cut into an
oblique angle or cambered section.

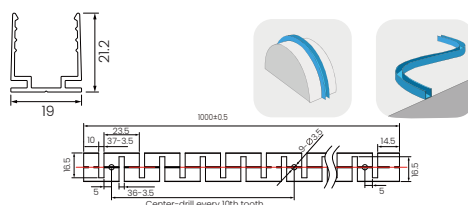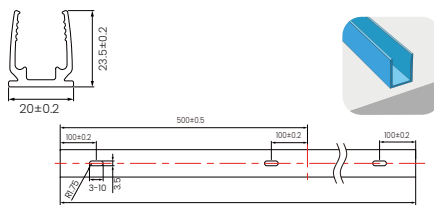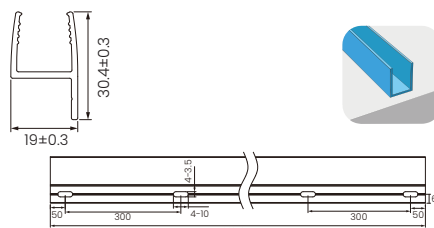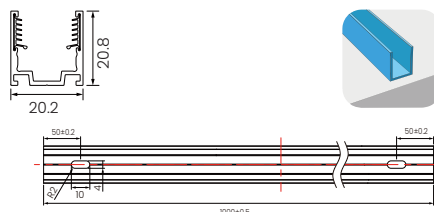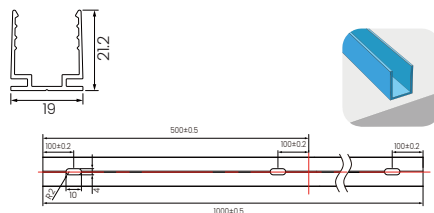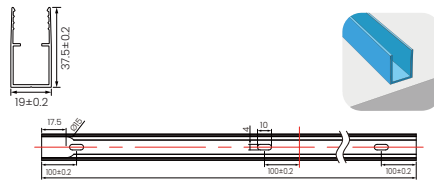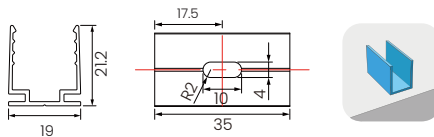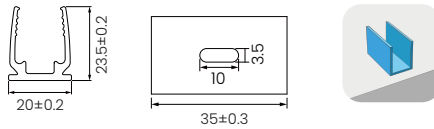

Installation Accessories



Adjustable Angle Clip
(use with aluminum clips or profile)

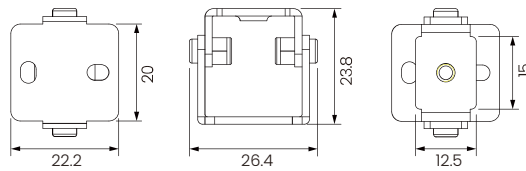

Dimension: 22.2x26.4x23.8mm

Accessories: Screw M3x25mm(SUS304)/M3.5x8mm(SUS304)

Flexible Recessed
Single-Sided Aluminum Profile

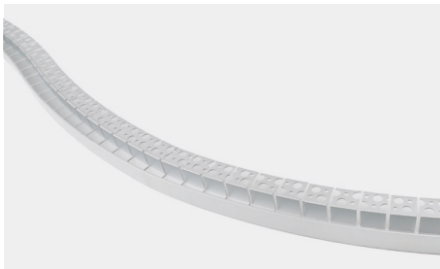




Length:

1000x39.1x19.9



Accessories:

Screw M3 × 16 (SUS304)

Installation method of flexible recessed single-sided aluminum profile

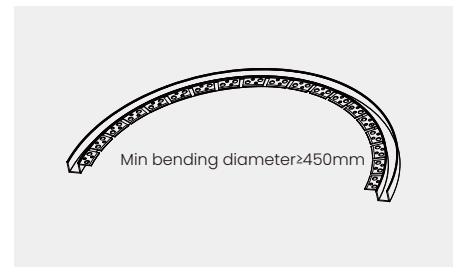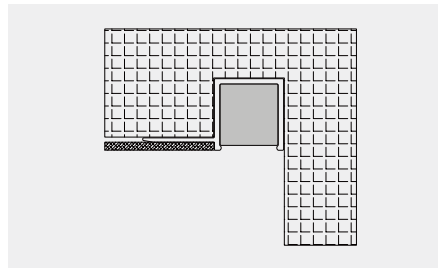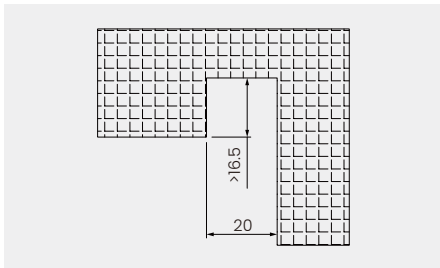

Flexible Recessed
Double-Sided Aluminum Profile

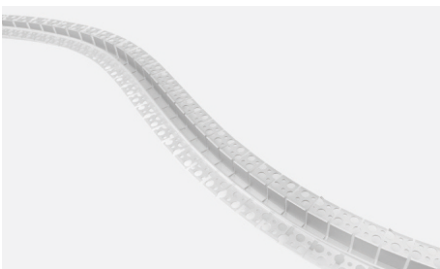




Length:

1000x58.9x19.9

Accessories:


Screw M3 × 16 (SUS304)

Installation method of flexible recessed double-sided aluminum profile

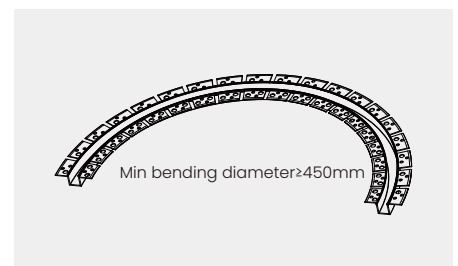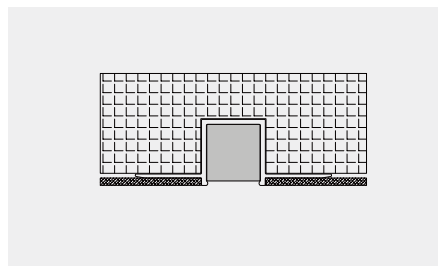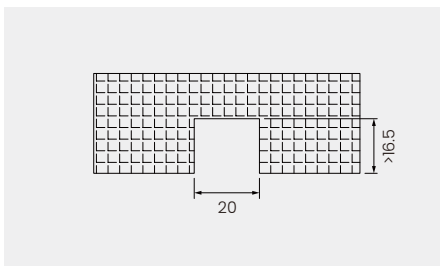


Single Color Connection Diagram


Non-dimmable

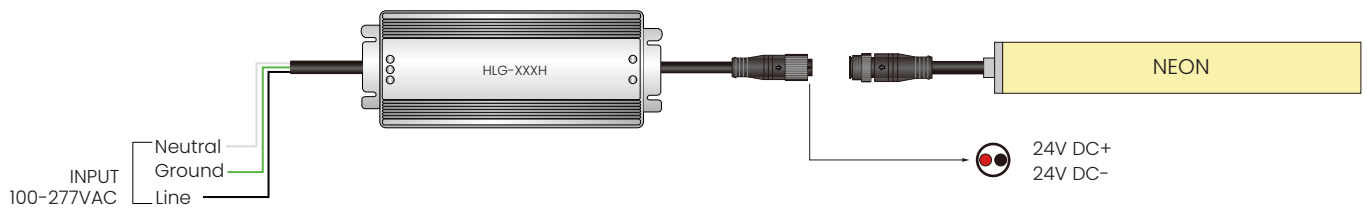


Phase-Cut / TRIAC Dimming

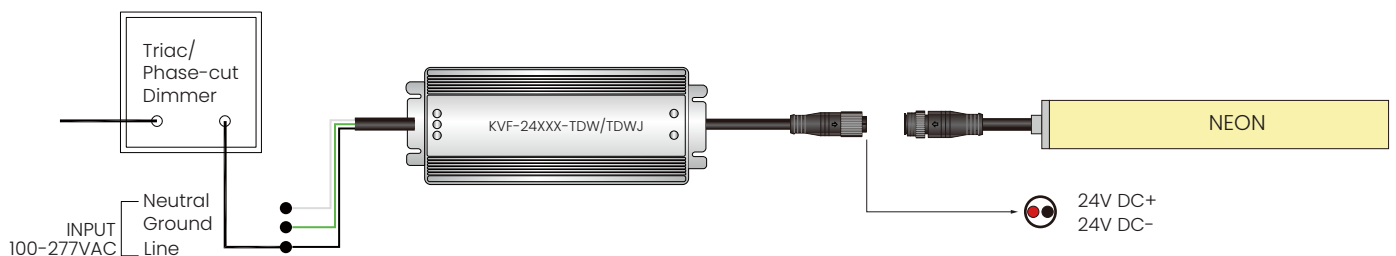



4-in-1 Dimming(0-10V/1-10V/Potentiometer/10V PWM)

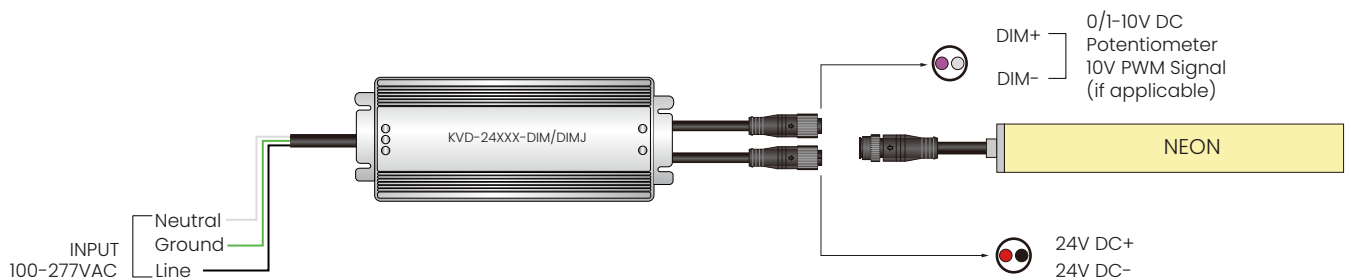


5-in-1 Dimming (Triac/0-10V/1-10V/Potentiometer/10V PWM)

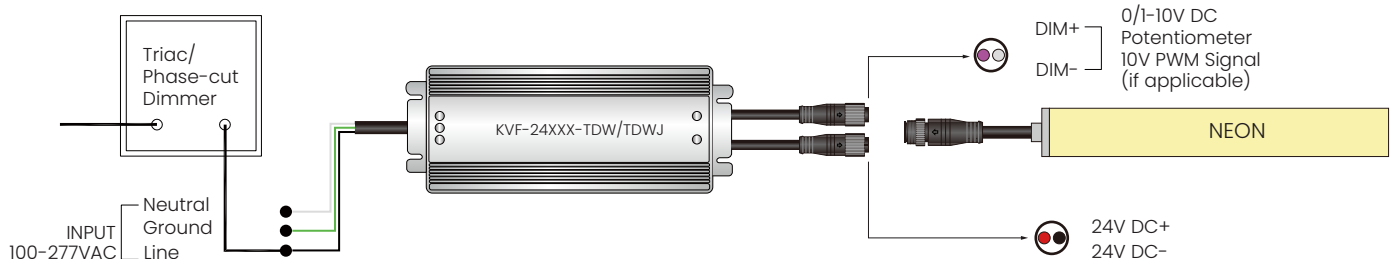


Installation Precautions

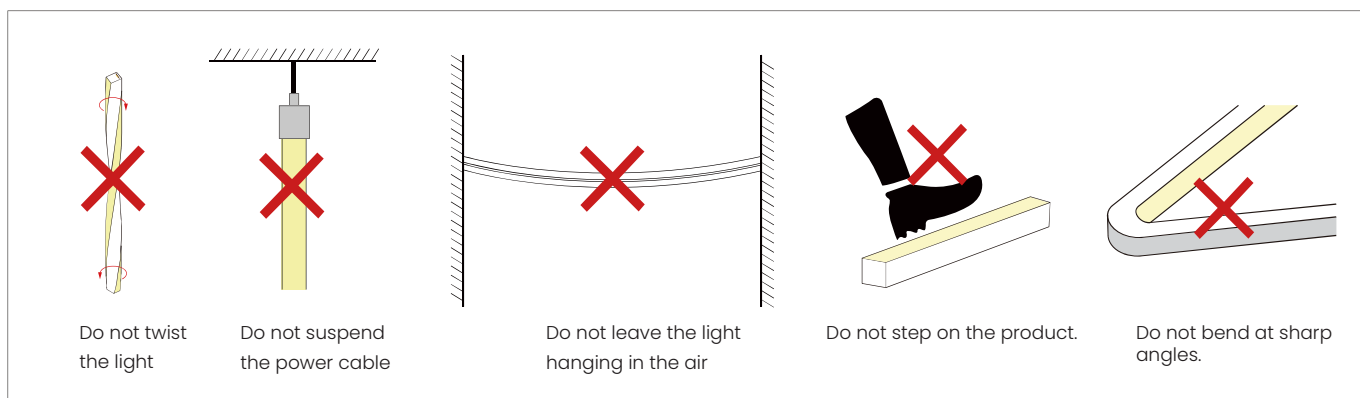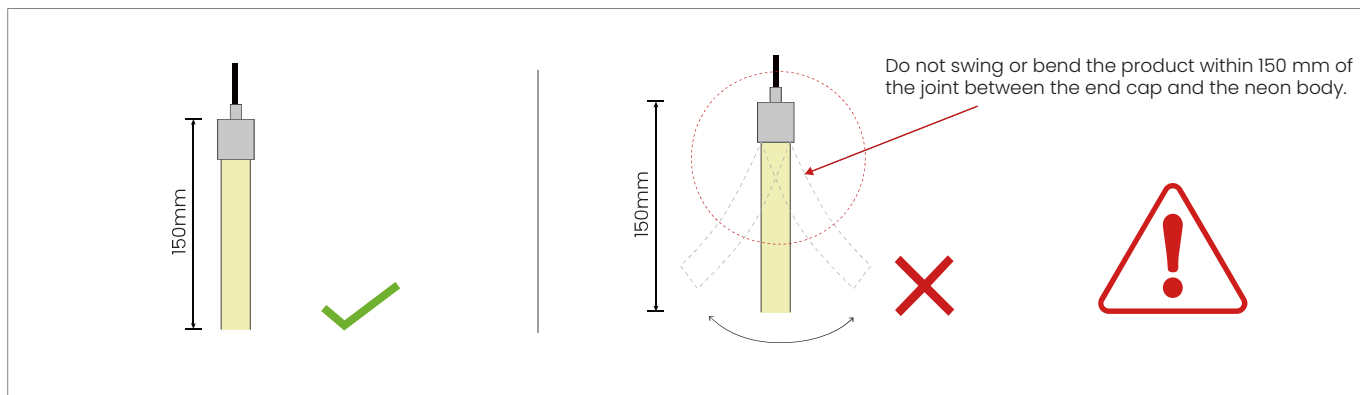


Insert into the Profile

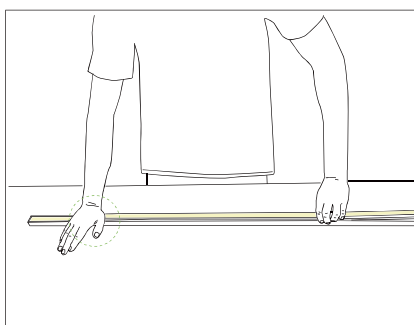

- Use your palm to slowly press the LED strip into the channel, then gently straighten it along the channel.
- Try to keep the led strip in a flat state during the installation process.

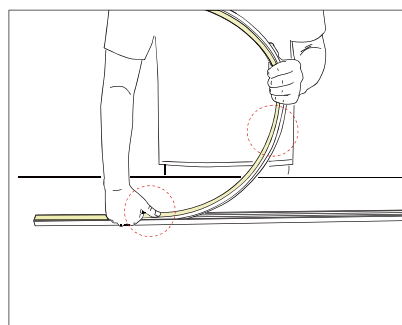

- Do not press the LED strip with one finger; this may damage internal components.
- The bent arc of the led strip should not be too large during installation.

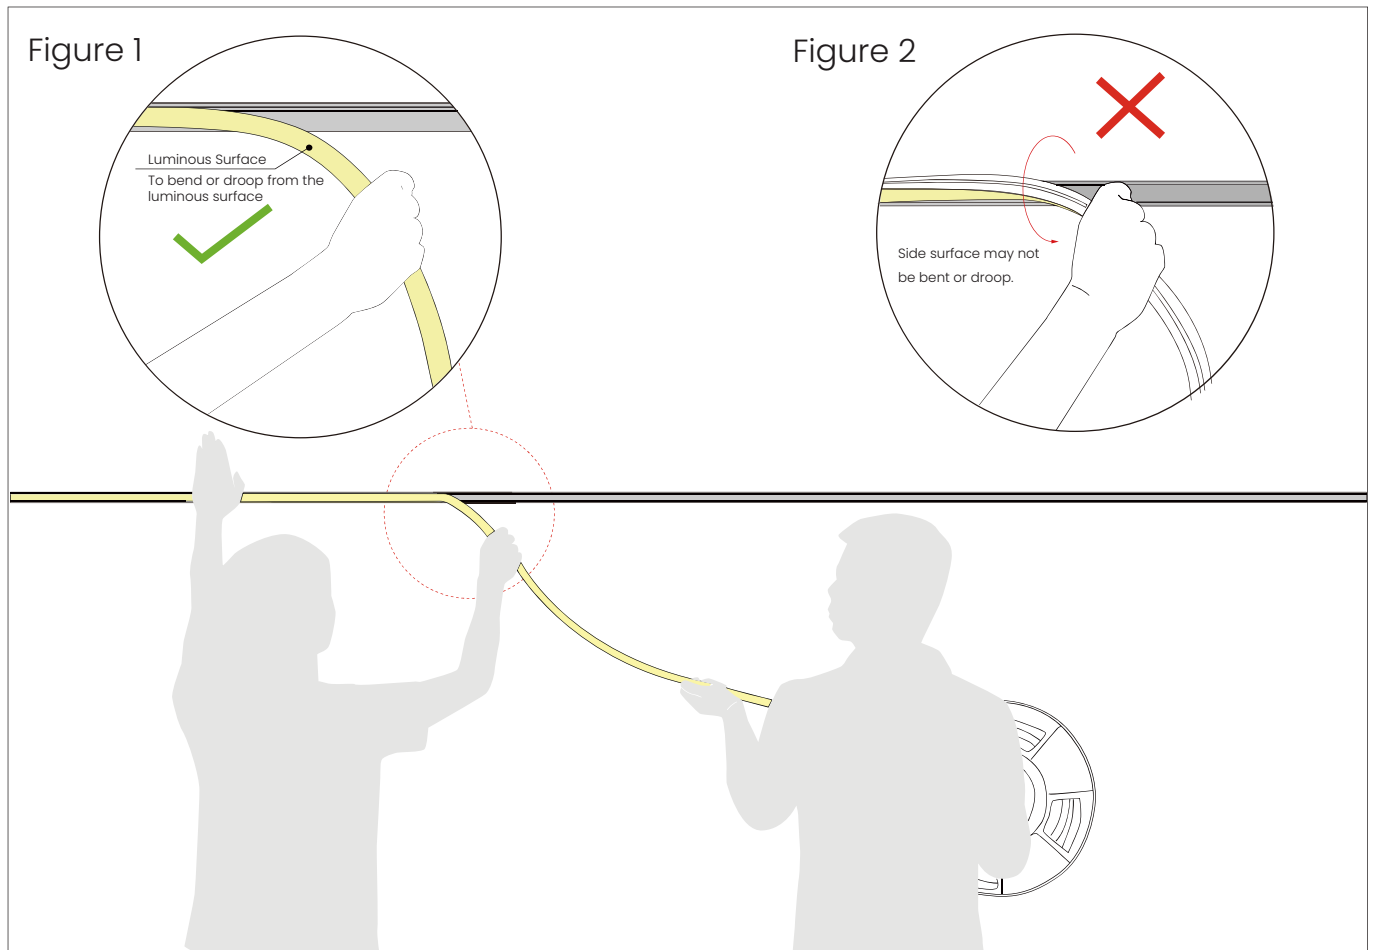
Installation Precautions--Side Mounted (If the length of the light is more than 2 meters, two people must work together to install it.)**1. Installer:**

- Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with right hand so that it droop it in the direction of your hand. See Figure 1.
- Side surface may not be bent or droop, See Figure 2.

2. Assistant:

- Cooperate with the installer to lift the reel of the light, and then slowly deliver the light to installer. Do not pull or twist the light during the installation.

Installation Precautions--Side Mounted (If the length of the light is more than 5 meters, two people must work together to install it.)

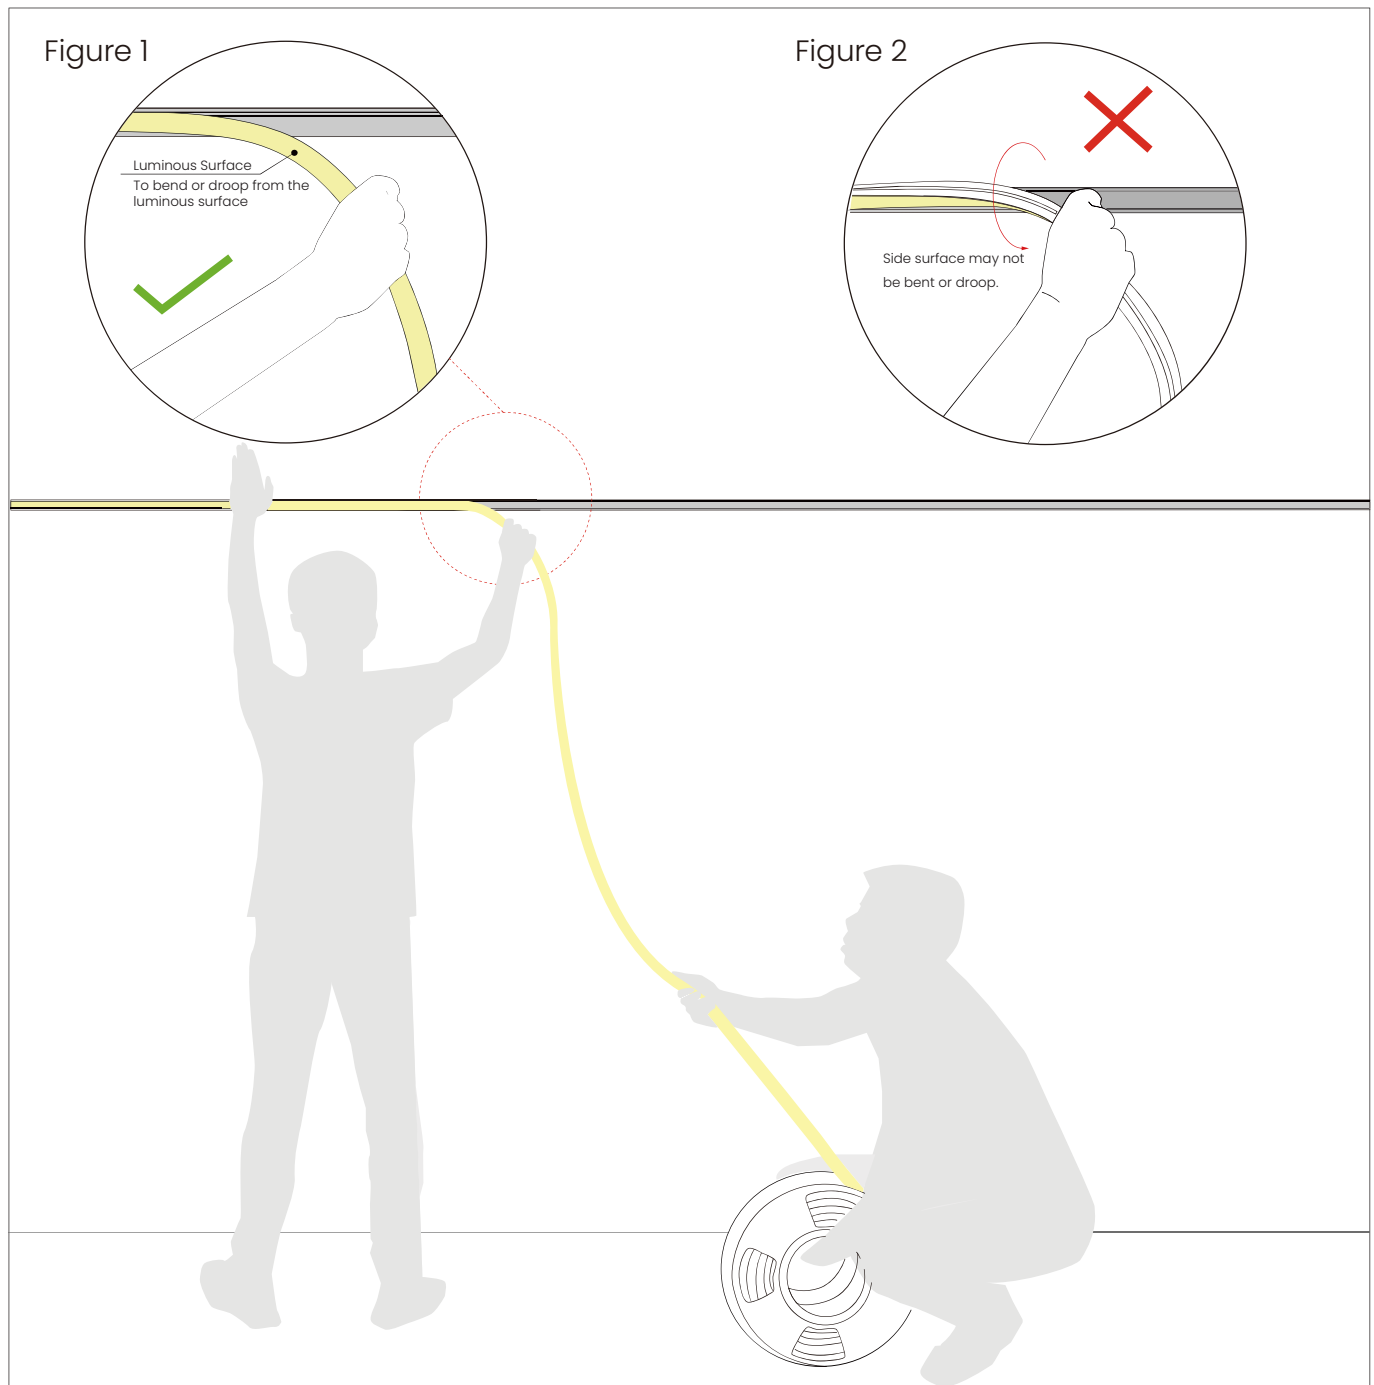


1. Installer:

- Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with right hand so that it droop in the direction of your hand. See Figure 1.
- Side surface may not be bent or droop, See Figure 2.

2. Assistant:

- Cooperate with the installer to slowly deliver the light to installer.
- Do not pull or twist the light during the installation.

Installation Precautions--Top Mounted (If the length of the light is more than 2 meters, two people must work together to install it.)

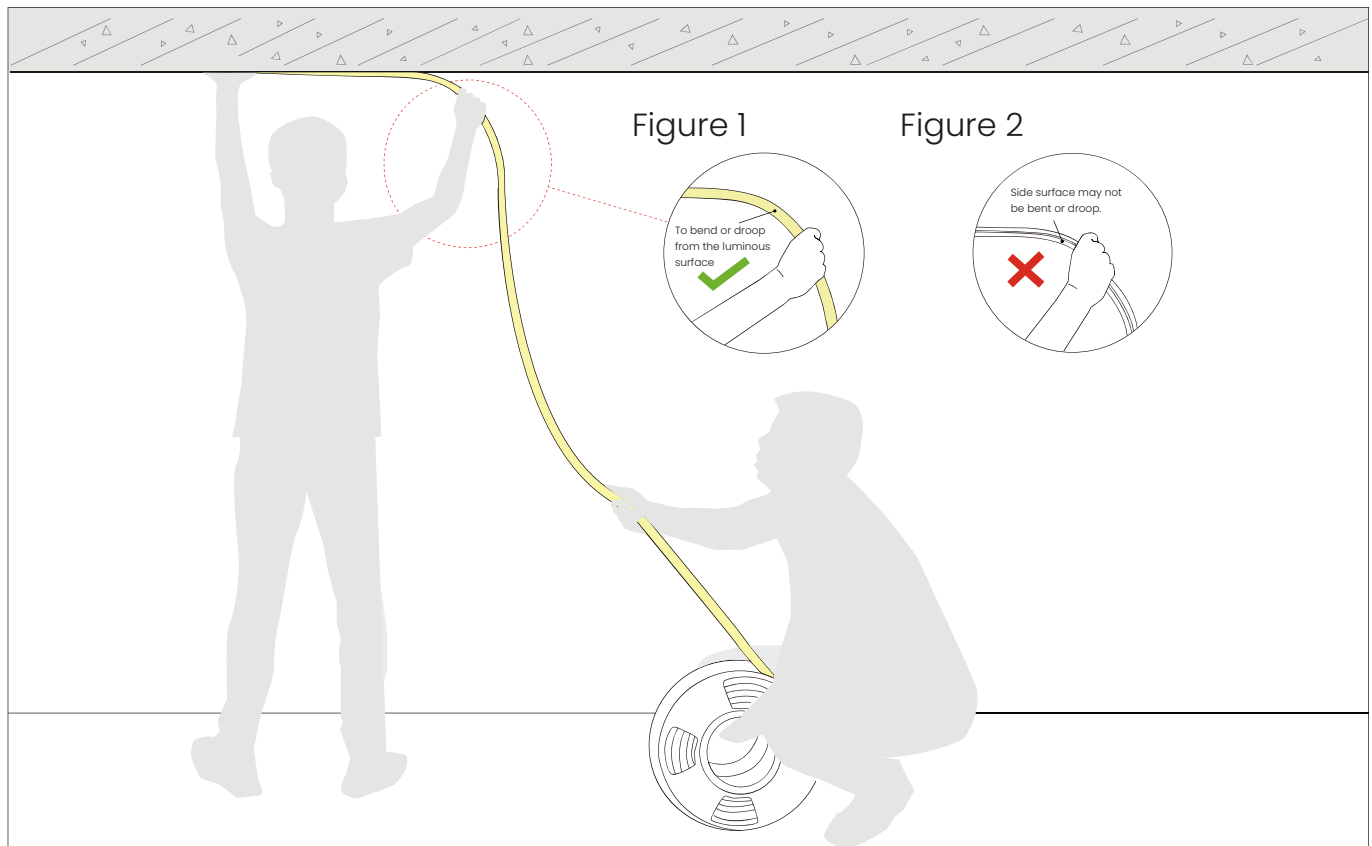

1.Installer:

- Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with right hand, hold it and rotate it 90° to droop it in the direction of your hand. See Figure 1.
- Side surface may not be bent or droop, See Figure 2.

2.Assistant:

- Cooperate with the installer to slowly deliver the light to installer. Do not pull or twist the light during the installation.

Packaging Information



Standard Packaging: White carton with paper reel inside.

Model	Qty/Roll(m)	Rolls/Carton	Carton Size	Net Weight	Gross Weight
NS-S1617LR 24V IP67	5m	8	41 x 41 x 26 cm	11.8 kg/carton	13.2 kg/carton
NS-S1617LR 24V IP67	10m	3	41 x 41 x 26 cm	8.9 kg/carton	10.1 kg/carton
NS-S1617LR 24V IP67	20m	2	41 x 41 x 26 cm	11.8 kg/carton	12.8 kg/carton
NS-S1617LR 24V IP67	24m	1	41 x 41 x 26 cm	8.7 kg/carton	9.5 kg/carton

For reference only. Final packing information shall be subject to actual shipment.

Notes

Cable size at the power-supply output depends on the total load current and cable length. Select the cable according to the table below.

Light Current	Cable Specification								
	L=1M	L=2M	L=4M	L=6M	L=8M	L=10M	L=12M	L=14M	L=16M
1A	AWG26	AWG23	AWG21	AWG18	AWG18	AWG17	AWG16	AWG15	AWG15
2A	AWG23	AWG21	AWG18	AWG16	AWG15	AWG14	AWG13	AWG12	AWG12
3A	AWG22	AWG18	AWG16	AWG14	AWG13	AWG12	AWG11	AWG11	AWG10
4A	AWG21	AWG18	AWG15	AWG13	AWG12	AWG11	AWG10	AWG9	AWG9
5A	AWG20	AWG17	AWG14	AWG12	AWG11	AWG10	AWG9	AWG9	AWG8
6A	AWG18	AWG16	AWG13	AWG11	AWG10	AWG9	AWG8	AWG8	AWG7
7A	AWG18	AWG15	AWG12	AWG11	AWG9	AWG8	AWG8	AWG7	AWG6
8A	AWG17	AWG15	AWG12	AWG10	AWG9	AWG8	AWG7	AWG7	AWG6
9A	AWG17	AWG14	AWG11	AWG10	AWG8	AWG7	AWG7	AWG6	AWG5
10A	AWG16	AWG14	AWG11	AWG9	AWG8	AWG7	AWG6	AWG6	AWG5

- ※ The unused light should be sealed with the packaging bag to avoid prolonged exposure.
- ※ Use a 24 V DC isolated constant-voltage power supply with ripple below 5%. Using other types of power supply may damage the light or cause other safety risks.
- ※ In practical application, Reserve at least 20% power-supply headroom.
- ※ It is recommended that professionals connect the power supply. Do not connect the power supply with live power to avoid electric shock.
- ※ Please confirm whether the voltage of the power supply is consistent with the voltage of the light; Pay attention to the positive and negative poles of the power cord, Do not reverse polarity, so as not to cause product damage;
- ※ When multiple power supplies are used, ensure that the positive poles of the power supply are not connected in parallel. Otherwise, the power supply system may be unstable or damaged after long-term operation.
- ※ If the actual application length exceeds the specified length, it may cause overload, overheating, and uneven brightness of the light.
- ※ During installation, please do not scratch, twist, or bend the light irregularly. Otherwise, the light may be damaged beyond repair.
- ※ To ensure the life and reliability of the light, please do not over bend the light, which will damage the product itself.
- ※ To protect your eyes, please avoid staring at the glowing surface of the light for a long time.
- ※ Installation, disassembly, and maintenance must be performed by qualified personnel only.
- ※ Do not use any acidic or alkaline adhesive to fix the light (including but not limited to glass glue, etc.)
- ※ IP67 products are not suitable for long-term immersion in water; IP68 versions are factory-customized only. User cutting or processing may compromise IP68 protection.
- ※ Because of the difference in structure, even if the same color temperature value, products of different sizes may appear slightly different in color.

Tests showed that formaldehyde and benzene compounds can cause yellowing of silicone. In newly decorated interiors, epoxy floor paint, wall paint, wallpaper adhesive, decoration materials, and new furniture may release formaldehyde and benzene compounds. It is recommended to remove these substances first, or ventilate the area for a period before installing the silicone neon light, to avoid affecting the silicone body.